

Project:



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List


CR-BG2B-FF

**Bar Gun
Sparkling & Still**



Specifications

- Bar Gun designed for fast flow dispensing of Sparkling & Still water
- Two button configuration
- 30" long hose
- Mechanical shut off and metering controls
- 3/8" connection with John Guest fittings
- Twist off nozzle for cleaning
- Comes with holster and drain assembly
- For use with CR-UCM1 or CR-UCM2 Remote systems

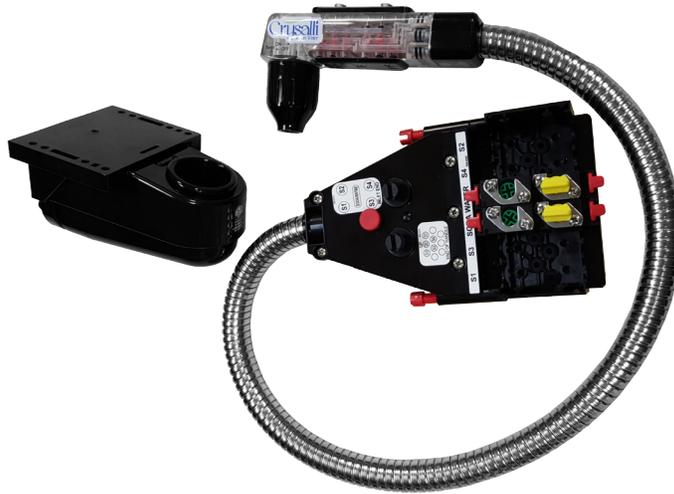

- ETL Sanitation Listed - Conforms to NSF 18
- Nozzle removes easily with no tools for cleaning & sanitizing
Never becomes stuck to inner nozzle
- Double o-ring fittings help prevent leaks
- Low maintenance and life cost
- Easy removal from bar with no tools
- Holster unit removable with no tools for easy cleaning
- Large drain tube from holster prevents backup (1/2" ID)
- Holster design helps prevent nozzle from contamination

For use with:

□ CR-UCM1

Remote Chiller unit
Sparkling & Still
50 ltr/13 gal per hr @<40°
Up to 35ft max trunk line run



□ CR-UCM2

Remote Chiller unit
Sparkling & Still
80 ltr/21 gal per hr @<40°
Up to 45ft max trunk line run



□ CR-KIT-UCM

Installation Kit for remote chiller units, UCM1 & UCM2, includes: 5ft of CR-4L38 trunkline, water pressure reducer valve, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower



NSF Certified under NSF/ANSI Standard 18

