

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-CTAC2 Gas Cylinder Auto Changeover Device

Device options:

- **CR-CTAC-2CK:** CO2 cylinder auto change device. Two cylinder kit, includes two 36" hoses with check valves and tank fittings, wall bracket and CR-3741 high pressure primary CO2 regulator.
- **CR-NTAC-2CK:** N2 cylinder auto change device. Two cylinder kit, includes two 36" hoses with check valves and tank fittings, wall bracket and CR-742N primary N2 regulator.

Features:




- Run two gas cylinders at one time.
- Automatically switches over empty gas cylinder to new full one.
- Doubles the amount of gas in use.
- Can be used with 5 lbs through 50 lbs cylinders.
- Great for high volume customers that can't use bulk cylinders.
- Can double the volume of smaller tanks in cabinets.
- Priority Select feature allows you to designate which cylinder is considered primary.
- Installation is quick and simple.
- No electrical, operates with pressures.
- Optimizes route planning.
- Ensures a continuous supply of gas.
- Reduces frequency of changing cylinders.



Gas cylinders not included

Specifications

- 6" W x 4.6" H x 2" D
- Gas service: Inert
- Inlet (2) and Outlet (1): 1/4" NPT
- Safety: Self-resetting 175 psi
- 3,000 PSI gauges
- 36" High pressure metal braided hose
- Non-electrical

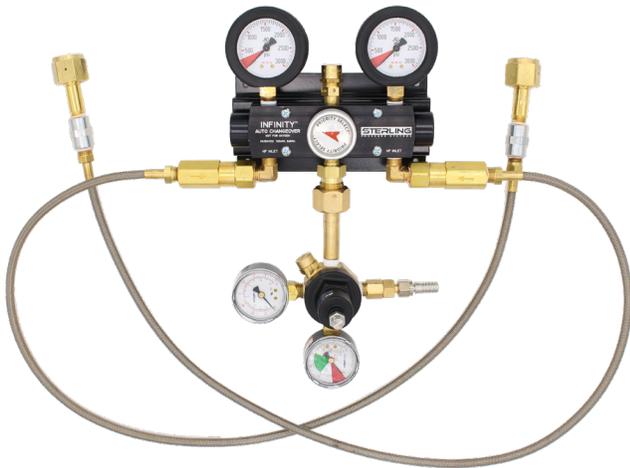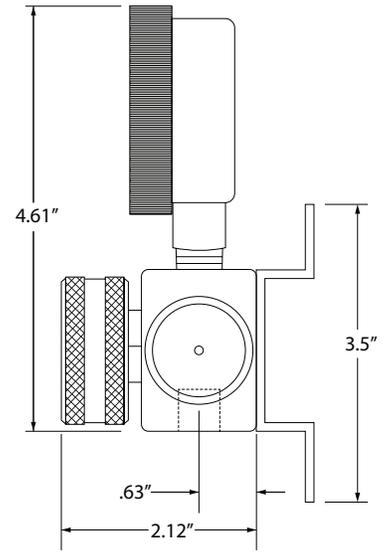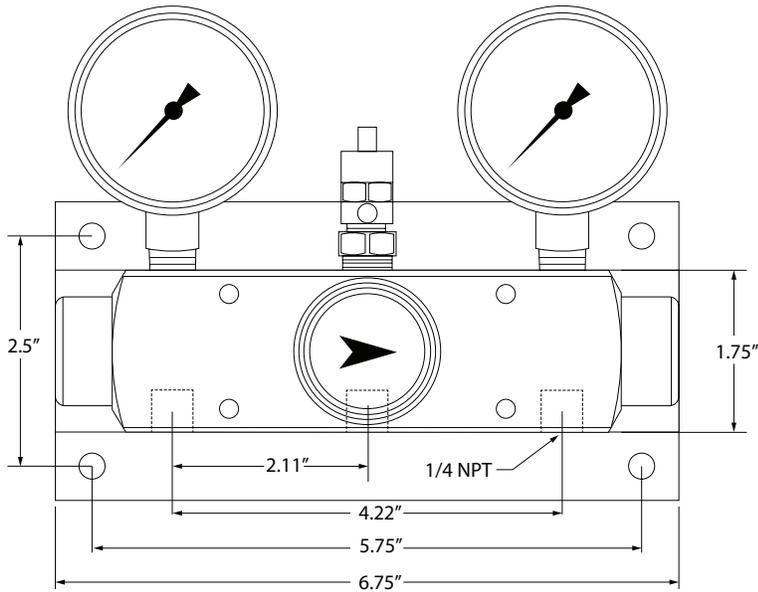

Accessories:

- CR-CWB2
Cylinder safety wall bracket

