

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CBDS-UCM2-2CL-S0096

Remote Beverage Chiller




Fountain Dispense Cold Carb Chiller

- Remote recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser(s)
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean stainless steel cabinet
- 304 stainless steel brushed finish panels
- Reduced counter space need compared to cold plate systems

Specifications

- Dispense capacity: 3, 12 oz drinks per minute (Max capacity: 145, 12 oz drinks at this duty cycle)
- Flow rate: 3 oz per second
- Dispense temperature: <40°F
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,600 per hour average
- Electrical: 120 VAC
- Minimum amps: 20.9
- Cold carbonation technology
- Carbonator: 1.67 GPM (100 GPH)
- Water Bath: 6 Gallons
- Ice Bank: 25 lbs
- Dry Weight: 170 lbs
- Built-in re-circulatory pump allows for an installation distance up to 75' between tower and chiller
- 20"W x 26"D x 20"H

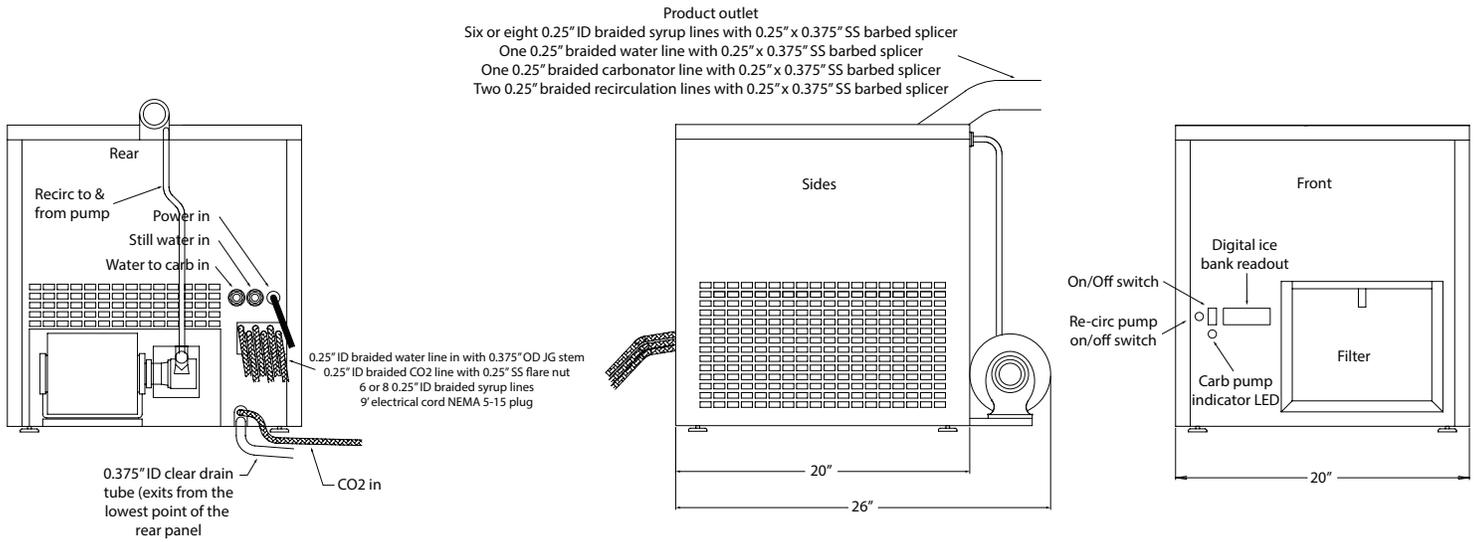

	CBDS-UCM2-2CL-S0096-R6	CBDS-UCM2-2CL-S0096-R8
Coil quantity	6 syrup coils	8 syrup coils
Coil description	6 foot stainless steel tubing 0.313" OD with 0.02" wall	

Accessories:

- CR-24FCP with Prefilter
 - CR-24FC without Prefilter
- Twin filter system with compact fibre dyne filters, 19"H x 17"W
 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- CBDS-KIT-2CL-R4/6
- Kit includes fittings, tubing, clamps and insulation to complete the installation of the Crysalli filter system to the remote chiller, trunkline, bar gun or Crysalli dispense tower.



- CR-PC160-14FCV
 - Customer supplied CO2 tank required
- Primary high pressure CO2 regulator for CO2 tank



- CR-CWB1
 - CR-CWB2
- Cylinder safety restraint wall bracket



- CR-TFB1
- Thermostatic fan box recommended anytime a remote chiller is installed in a cabinet



- CR-6V-BIB-KIT
 - CR-8V-BIB-KIT
- Backroom kit, 6 or 8 BIB pumps, two wide by two high flat shelves



- CBDS-08002
 - CBDS-10004
- Insulated bundle with barrier tubing (eight or ten 3/8" OD product and two 3/8" recirc)



- CM-T-6V-PBV
 - CM-T-8V-PBV
- Six or eight valve, postmix soda, "T" tower with LED dispense buttons and an integrated base and drip pan



- CR-WMB2 wall mount bracket for CBDS-UCM2



- CR-ABUCM air baffle accessory
- Air baffle recommended anytime a remote chiller is installed in a cabinet

