

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-1SW

Compact countertop





Chilled still water only on tap

- Flow control faucets for chilled still water on two valves
- European design, mirrored finish stainless steel exterior
- Made in the USA

Specifications

- 37 liters/10 gal per hour @ <40°
- Self-contained refrigeration system
- Compressor: 1/5 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,200 per hour Ave
- Operating temperature range: 40°-100°
- Electrical: 120v - 3 Amps
- Water Bath: 3 Gallons
- Ice Bank: 17 lbs
- Weight: 75 lbs
- Clearance: 12"
- 12.5"W x 25.75"D x 24.5"H

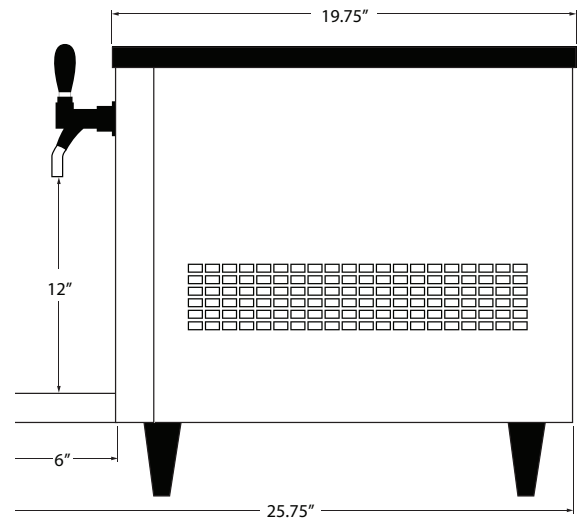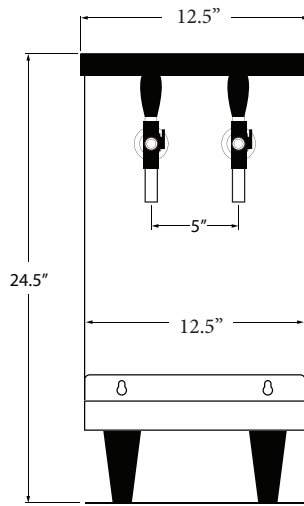

- 3/8" Water inlet connector
- 7' Over flow drain hose
- 9' Electrical cord NEMA 5-15
- 4.25" legs

- Air intake at rear with air filter
- Allow for 6" rear & side clearance around unit for air flow
- Drip/Drain Pan: 1/2" barb fitting

Accessories:

- CR-24FCP with prefilter
- CR-24FC without prefilter

Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- CR-KIT-SWCT

Installation kit for countertop still water chillers, CR-1SW & CR-2SW, includes: Various fittings and oetiker clamps, and extra tubing
Still Water units only



- CR-SDL-1

Single sanitary dispense lever that attaches to a self closing faucet on unit. 1 per faucet. Great for self-service hands-free dispensing applications.

