

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CP2000-R-UC-BH Remote Undercounter Mount





Low volume sparkling & chilled still water on tap

- Perfect for office, hotel suites, wineries & residential
- For use with Crysalli dispenser towers
- Cold carbonation for better long lasting sparkling water
- Bulkhead fittings for easy hookup to faucet. Extra fittings and water pressure reducer valve supplied with CR-KIT-CPUC

Specifications

- 50, 12oz drinks per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Operating temperature range: 40°-100°
- Electrical: 120v - 4.5 Amps
- Minimum circuit breaker: 15
- Water Bath: 2.5 Gallons
- Ice Bank: 6 lbs
- Weight: 80 lbs
- Built-in re-circulatory pump allows for an installation distance up to 6' between tower and chiller
- 11.75"W x 17.5"D x 16.5"H
- Stainless Steel water coils
- Reverse Osmosis Compatible

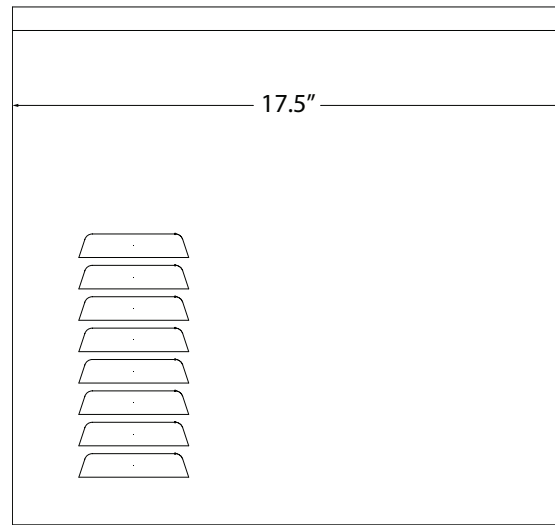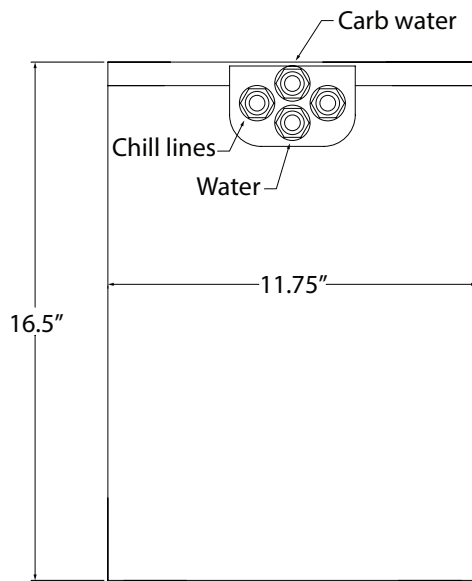

- Allow for 6" rear & side clearance around unit for air flow
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- 7' Overflow drain hose

Accessories:

□ CR-14FCP with Prefilter

□ CR-14FC without Prefilter

Filtration systems feature one 4FC Fibredyne technology, quick change, sanitary cartridge. T.O.C. capacity 15,000 gal at 2.5 GPM.



□ CR-KIT-CPUC

Kit includes LBS-10JG leak block sensor, water pressure reducer valve, fittings needed to complete the installation of CR-14FC filter system to remote chiller CP2000-R-UC-BH and tower or faucet, and extra tubing



□ CR-PC160-14FCV

Primary High Pressure CO2 Regulator for CO2 tank



□ Customer supplied CO2 Tank required

□ CR-CWB1

□ CR-CWB2

Cylinder safety restraint wall bracket

