

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CP2000-CT2

Pull Handle Faucets, Countertop Mount





*Mirrored finish available upon request

Low volume sparkling and chilled still water on tap

- Perfect for office, hotel suites, wineries & residential
- Cold carbonation for better long lasting sparkling water
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- 304 stainless steel brushed finish*

Specifications

- 50, 12oz drinks per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Operating temperature range: 40°-100°
- Electrical: 120v - 3 Amps
- Carbonator: 1 GPM
- Water Bath: 2.5 Gallons
- Ice Bank: 6 lbs
- Weight: 80 lbs
- Clearance: 9"
- 12"W x 26"D x 20.75"H
- Stainless steel water coils
- Reverse Osmosis Compatible

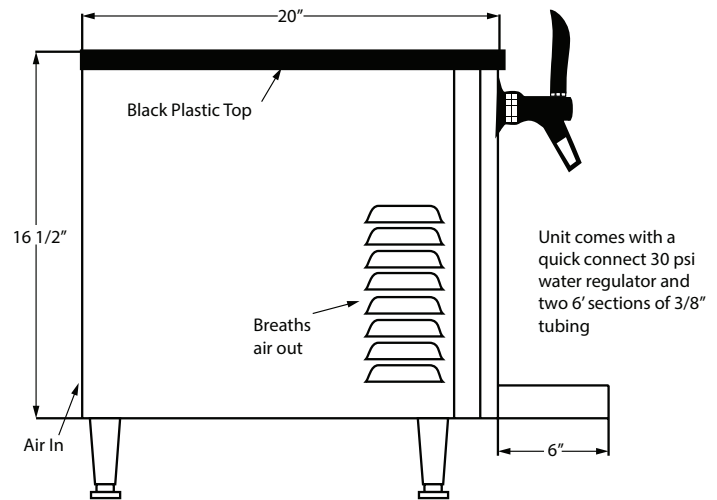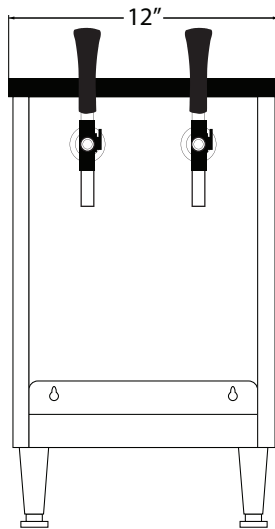

- Air intake at rear
- Allow for 6" rear & side clearance around unit for air flow
- 4.25" legs
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- 7' Overflow drain hose
- Condensate drain into drip pan

Accessories:

- **CR-14FCP with Prefilter**
- **CR-14FC without Prefilter**

Filtration systems feature one 4FC Fibredyne technology, quick change, sanitary cartridge. T.O.C. capacity 15,000 gal at 2.5 GPM.



- **CR-KIT-CPCT**

Kit includes fittings needed to complete the installation of CR-14FC filter system to Countertop CP2000-CT2. Includes: Water pressure reducer valve, fittings, and extra tubing
CP2000 CT Series Only



- **CR-SDL-1**

Single sanitary dispense lever that attaches to a self closing faucet on unit. 1 per faucet. Great for self-service hands-free dispensing applications.



- **CR-PC160-14FCV**
Primary High Pressure CO2
Regulator for CO2 tank



- **CR-CWB1**
- **CR-CWB2**
Cylinder safety restraint
wall bracket



- **Customer supplied CO2 Tank
required**

