

Project:



Scan for more info!

Owners manual
Install guide

iN2-2P ProFusion Injection Device





N₂ Beverages on Tap

- Easily add a ProFused beverage to your draft system.
- The iN2-2P injector is designed for use in a back bar, direct draw cooler or walk-in box when paired with our iN2 draft tower.
- The ProFusion system uses one cold keg of cold brew coffee, tea or your craft beverage of choice and dispenses two different style beverages from a single keg
- Nitrogenated or lightly carbonated, and Still Beverage on Tap.
- Simple set-up configuration: One keg connection, two outlets. One gas connection, feeds both the system and keg (each with their own pressure control).
- High visibility and easy accessible particulate filter
- Compact, thin design that can easily fit in coolers and not take up excessive space.

Specifications

- 10.5"W x 4.5"D x 12.75"H includes top and bottom mounting bracket
- One gas inlet, dual gas control for keg and injector pressures
- One product from keg inlet, two product outlets
- Built in stainless steel particulate filter, 50 micron, washable and reusable
- Allow 4" clearance recommended for easy access to regulators and particulate filter
- Weight: 6.25 lbs
- Stainless steel enclosure
- John Guest® swivel fittings and barb to stem adaptors
- All other components supplied separately per customers use and set-up
- Must be located in a refrigerated space within five feet of dispensing tower
- Liquid and gas inlet/outlet ports are on one side of the iN2-2P injector

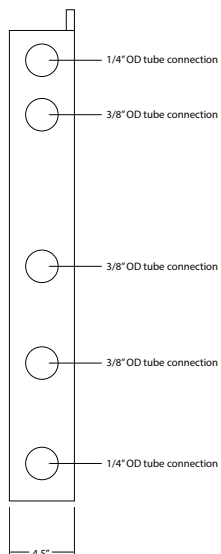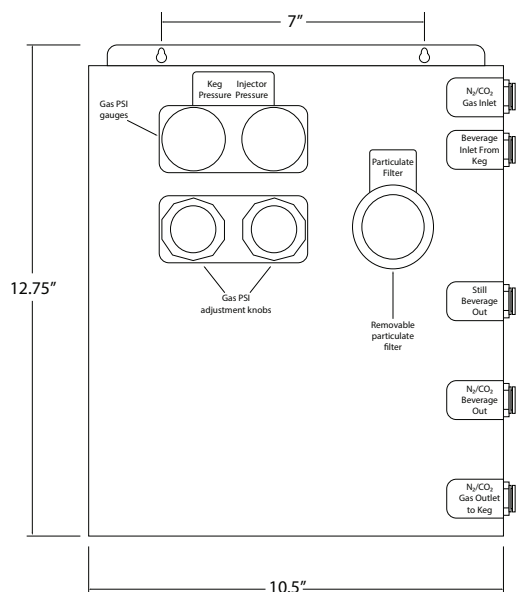

Accessories:

- **CR-PMT-5G**
5 gallon premix tank



- **CR-PMT-2.5G**
2.5 gallon premix tank



- **CR-10-1591**
Cleaning and sanitizing kit for cold brew systems



- **CR-BLC-G**
Disconnects for premix tank



- **CR-BLC-L**
Disconnects for premix tank



- **CR-220DSS**
D Style stainless steel



- **CLM-V2-N2**
Stout faucet for N2 beverage



- **CR-G26SS**
304 stainless steel nitro faucet



- **CR-SSX0101-HEX**
HEX faucets, for premix beverage



- **CR-PN60-516BSO**
Primary N2 tank regulator
- **CR-PC160-14FCV**
Primary CO2 tank regulator



- **CR-153-5SS**
304 stainless steel shank
used with CR-G26SS nitro faucet



- **CR-X5SHNK**
5" wall shank



- **CR-CUSTAP**
Custom tap handles. Contact factory
for options and details.

- **CR-CUSTOMER**
Custom draft tower. Contact factory
for options and details.

