

Project:



**Scan for more info!**

Owners Manual  
Quick Install  
Quick Sizing  
Install Layout  
Parts List

**CM-2-PB-SB**  
**Counter Mount Push Button  
Slant Back Dispensing Tower**




**Sparkling & Chilled Water**  
**Two Valve Counter Mount**  
**Slant Back Design Tower**

12"W x 15.13"D x 17"H




**Specifications**

- Faucet flow rate: 1.5-2 oz per second
- Two valves for Sparkling and Chilled water
- Clearance: 12"
- Blue lit LED Push Button switches, push and hold to dispense
- For use and pairing with CR-UCM1 or CR-UCM2 Remote Chillers
- Recessed Drain Pan for flush mount fit
- Mirrored stainless steel finish
- Weight: 12 lbs

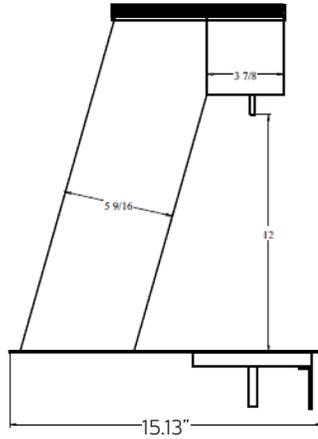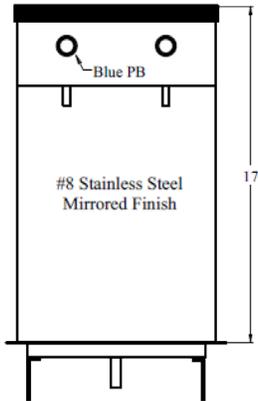

### Recessed Drain Pan (RDP) Cutout Dimensions

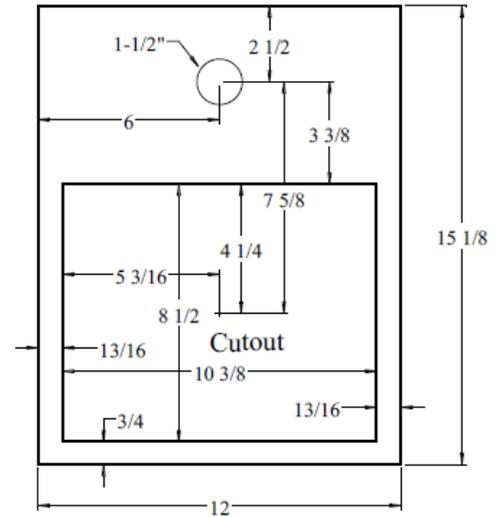

### For use with:

#### □ CR-UCM1

Remote Chiller unit  
50 ltr per hr @ <40°  
Up to 30ft max trunk line run  
Still & Sparkling



#### □ CR-UCM2

Remote Chiller unit  
80 ltr per hr @ <40°  
Up to 40ft max trunk line run  
Still & Sparkling



#### □ CR-KIT-UCM

Installation Kit for Remote Chiller Units, UCM1 & UCM2, Include:  
5ft of CR-4L38 trunkline, water pressure reducer valve, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower

