

Project:



Scan for more info!


Owners manual
Quick install
Quick sizing
Install layout
Parts list

LIT-V2C Draft tower



Sparkling & chilled still water
Two faucet tower

Specifications

- Flow rate is adjustable to your liking and can be locked in a specific setting
- Faucet flow rate: 1.5-2 oz per second
- Two specialized SS faucets for Sparkling and Chilled water
- Height: 20"
- Clearance: 12.73"
- Ergonomic handles
- Supplied with quick connect fittings for easy hook-up to our CR-4L38 trunkline
- For use and pairing with all Crysalli Remote Chillers
- 22 MM LED back lit medallions with sparkling and chilled still logos
- Weight: 14 lbs

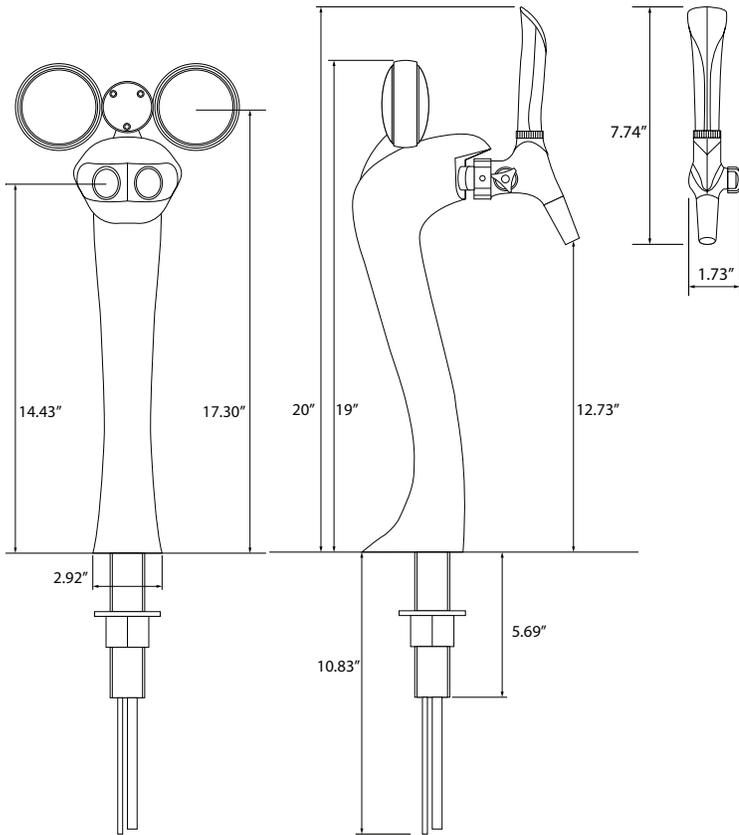

RDP-1-SSQ hole cut and dimensions

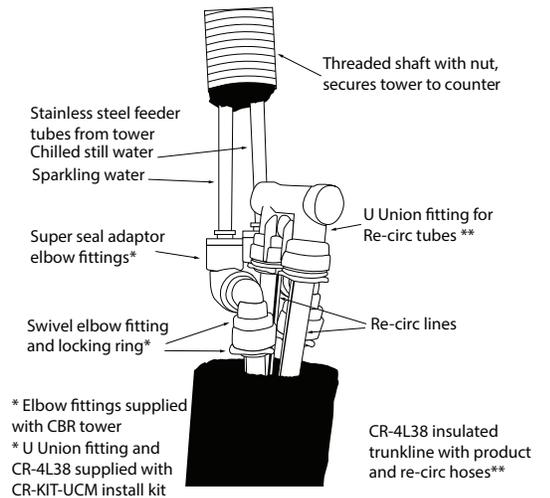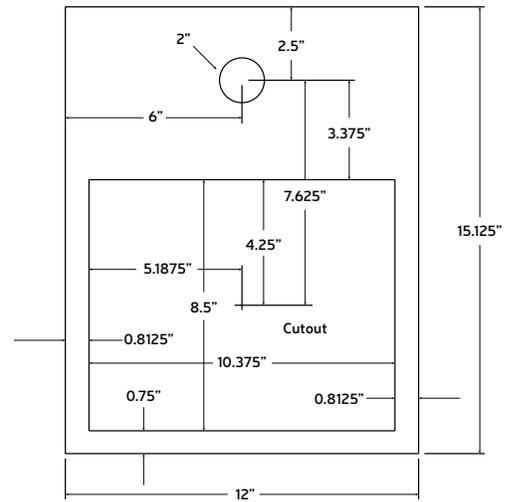

Accessories

- CR-100301-C
Optional Chrome Handles:



- DP-CT
Stainless Countertop Mount
drain pan



Configured with a drain tube for
direct plumbing



Or with rubber feet when no
drain is available:

- DP-CT-LD




- RDP-1SSQ-2CL
Recessed Drain Pan



Overall 12" Wide x 15 1/8" Deep

- 2" Hole for tower
- 10.375" x 8.5" drain pan section cutout
- 0.5" copper drain stem
- 2" threaded studs for mounting, 10-24 thread with locking nut and 3" x 1" SS mounting strips



BIM | CAD | MOBILE

