

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-2 Countertop





*Mirrored finish available upon request

Sparkling & chilled still water on tap

- Cold carbonation for better long lasting sparkling water
- Flow control faucets for sparkling & chilled still water
- Sleek design
- 304 stainless steel brushed finish*

Specifications

- 80 liters per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,600 per hour Ave
- Operating temperature range: 40°-100°
- Electrical: 120v - 15 Amps
- Carbonator: 1/3 H.P.
- Water bath: 6 Gallons
- Ice bank: 25 lbs
- Weight: 165 lbs
- Clearance: 12"
- 20"W x 28"D x 24.75"H

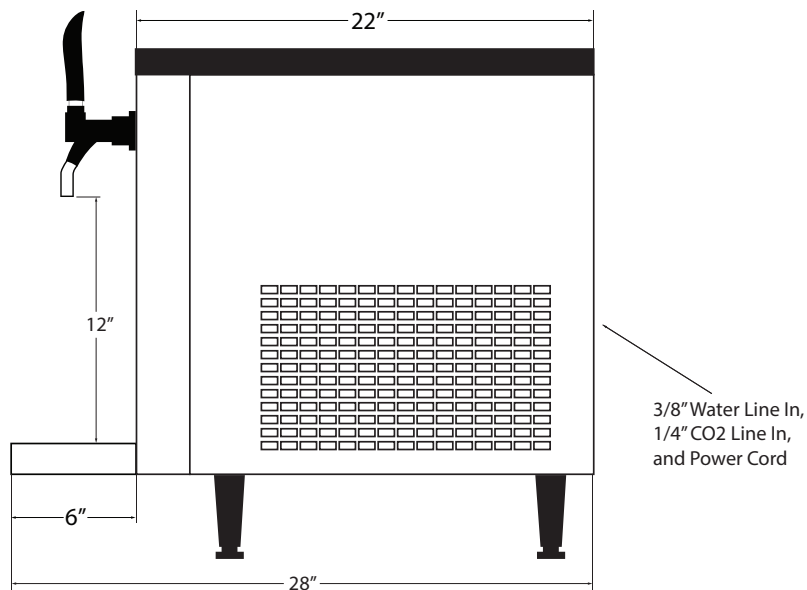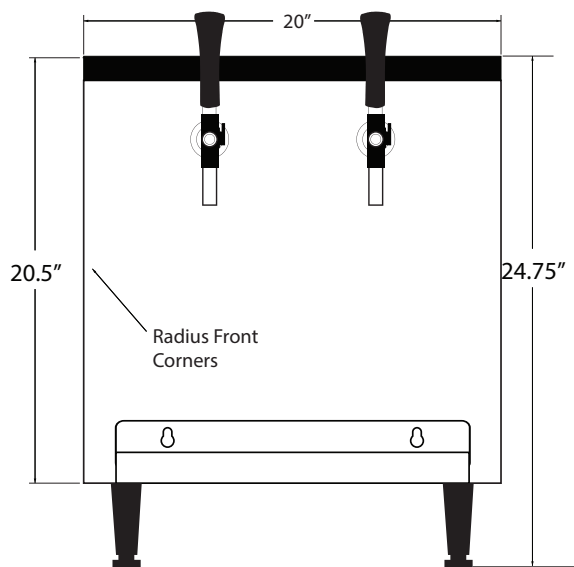

- 3/8" Water inlet connector
- 7' Over flow drain hose
- 7' CO2 hose 1/4" flare fitting
- 9' Electrical cord NEMA 5-15
- 4.25" legs

- Air intake at rear with air filter
- Allow for 6" rear & side clearance around unit for air flow

Accessories:

- CR-24FCP with prefilter
 - CR-24FC without prefilter
- Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- CR-KIT-CT
- Installation kit for countertop units, CR-1 & CR-2, includes: fittings and oetiker clamps and extra tubing to install the filter systems and countertop unit



- CR-PC160-14FCV
- Primary high pressure CO2 regulator for CO2 tank



- CR-SDL-1
- Single sanitary dispense lever that attaches to a self closing faucet on unit. 1 per faucet. Great for self-service hands-free dispensing applications.



- CR-CTAC2
- CO2 cylinder auto change over device. Connects two cylinders at one time to double your CO2 capacity.



- CR-CWB: Single cylinder
 - CR-CWB2: Two cylinders
- CO2 cylinder wall brackets, to safely strap and secure cylinders to the wall



- Customer supplied CO2 tank required

