

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-GFS-V1L

Filtered Water Glass Filling Station



Filtered ambient water on tap


- Drop-in, flush mount design in a small foot print
- Built-in water filter system for fresh clean tasting water
- Signature Crysalli styling CBR-V1C Chrome draft tower with stainless steel tubing and faucet
- 12.375" Bottle Clearance
- High flow rate up to 2 oz per second
- Self-closing, push lever or pull handle dispense action faucet
- Faucet can be used without the lever and configured to stay open

Specifications

- Pre-assembled and pre-plumbed with draft tower and water filter manifold mounted to the drain pan
- Reinforced stainless steel recessed drain pan with creased edges for positive seal to counter and 4 point mounting studs.
- Removable drain grate with bottle marker
- Drain pan dimension: 9.5"W x 14.75"L
- Requires a counter cut out: 8.375"W x 13.75"L
- 15" clearance into counter for filter system
- Tower height (including 4" tap handle): 21"H
- Requires water and drain drain within 6'

Everpure 2FC Filter Cartridge

- 1.5 GPM, 6,000 gallon capacity
- Advanced fibredyne carbon woven filter media with a cyst barrier layer
- Superior reduction of chlorine, tastes, odor, color and organic chemicals
- Exceptional sediment reduction below 0.5 Micron
- Certified reduction of microplastics
- Low pressure drop for long filter life
- Quick change sanitary cartridge that is recyclable
- Pressure requirements: 40 125 PSI
- NSF 42 Class 1, NSF 53 and NSF 401

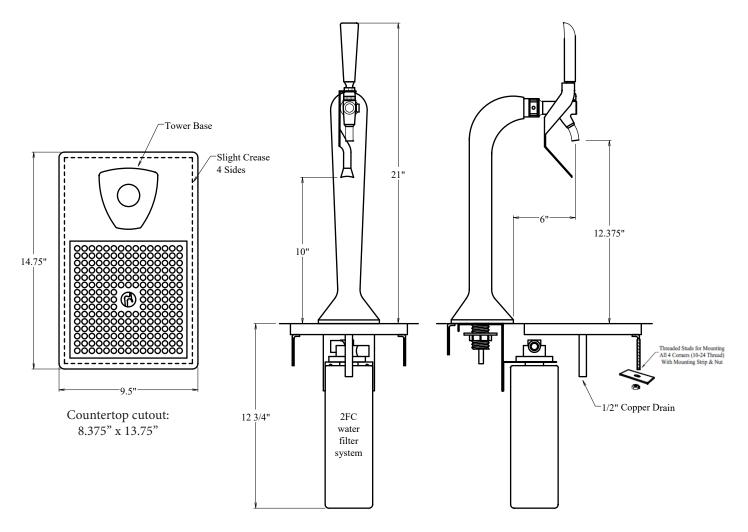

- 3/8" Inlet & outlet filter manifold
- 1/2" Copper drain stub
- 1" Deep drain pan
- Four, 10-24 threaded mounting studs with brackets and locking nuts
- Allow 2.5" clearance below Water filter cartridge for easy replacement

Install kit includes: Anglestop 2 way split adapter, direct quick connect adaptor, locking clips, 12' of 3/8" OD water inlet tubing, 6' of 1/2" drain hose with drain fitting and faucet spanner wrench

Accessories:

□ 2FC Replacement water filter Compact fibredyne cartridge, 1.5 gpm 6,000 gal capacity







