

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list


CRVS-V2C
Draft Tower



Sparkling & chilled still water
Two faucet tower

Specifications

- Flow rate is adjustable to your liking and can be locked in a specific setting
- Faucet flow rate: 1.5-2 oz per second
- Two faucets for Sparkling and Chilled water
- Height: 19.5"
- Clearance: 12.25"
- Ergonomic handles
- Supplied with quick connect fittings for easy hook-up to our CR-4L38 trunkline
- For use and pairing with all Crysalli Remote Series
- Weight: 13 lbs

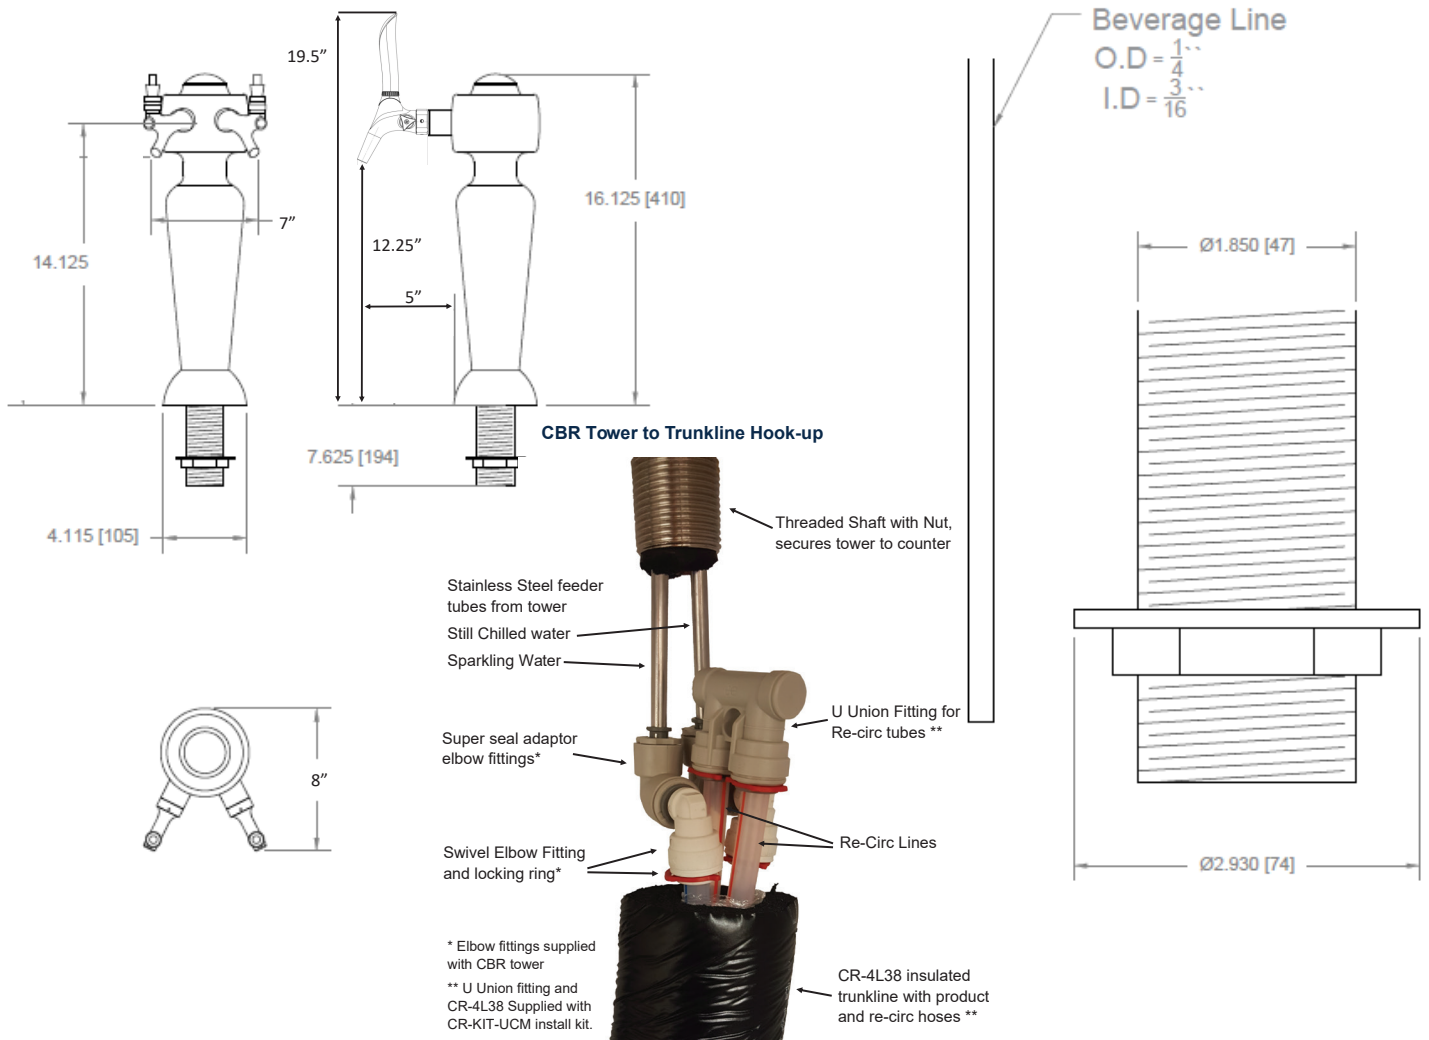

Accessories

- **CR-100301-C**
Optional chrome handles:



- **DP-CT**
Stainless countertop mount drain pan



Configured with a drain tube for direct plumbing



Or with rubber feet when no drain is available:

- **DP-CT-LD**



- **RDP-3SSQ**
Recessed drain pan



Overall 15" wide x 18 1/8" deep

