

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

Bottle Filling Station

Manual Fill



For use with: sparkling, chilled still, and ambient water

- BFS-V1-M Single product, single button manual fill
- BFS-V2-M Two product, two button manual fill
- BFS-V3-M Three product, three button manual fill





BFS-V2-M



BFS-V3-M

Specifications

- Up to three buttons with three products
- Manual fill water stations, push and hold
- Counter mount or wall mount capability
- LED down light, illuminates when dispensing
- Metal push button with LED outer ring
- Removeable drain pan, plumbed or plugged
- Faucet flow rate: 1.5-2 oz per second
- Width: 12"
- Depth: 7"
- Height: 20"
- Clearance: 13"
- For use and pairing with all Crysalli Remote Chillers
- Weight: 11 lbs

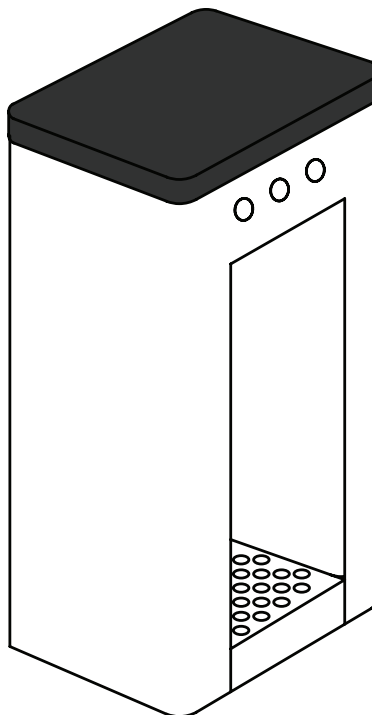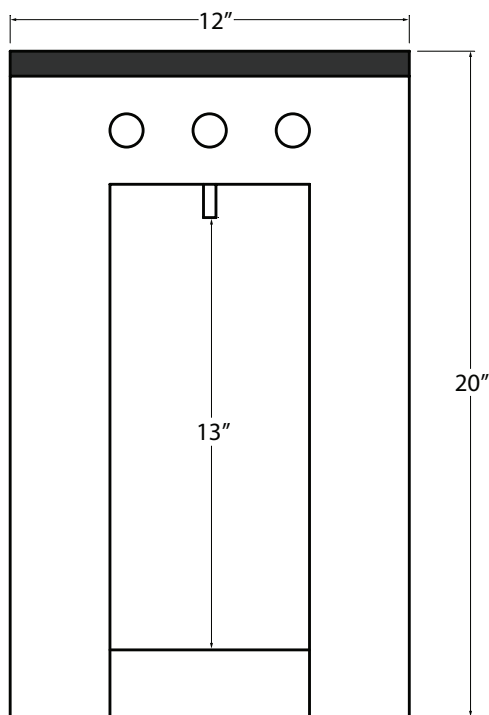

**Shown above is the line drawing for the BFS-V3-M. The BFS-V1-M and BFS-V2-M are the same dimensions and clearances, button configuration is the only difference*

For use with:

□ CR-UCW-BH

Remote Chiller unit
50 ltr per hr @ <40°
Up to 30ft max trunk line run
Still & Sparkling



□ CR-UCM1

Remote Chiller unit
50 ltr per hr @ <40°
Up to 30ft max trunk line run
Still & Sparkling



□ CR-UCM2

Remote Chiller unit
80 ltr per hr @ <40°
Up to 40ft max trunk line run
Still & Sparkling



□ CR-KIT-UCM

Installation Kit for Remote Chiller Units, UCM1 & UCM2, Include:
5ft of CR-4L38 trunkline, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower

