

CCP2000-UCR-CBR

Free-Standing Sparkling & Chilled Still Water
Glass Filling Station



Free-standing, sparkling and chilled still glass filling station. Pre-assembled with draft tower and undercounter chiller. Suitable for low-volume service stations and hospitality applications.

Features

- Signature Crysalli styling CBR-V2C chrome draft tower with stainless steel tubing and faucet
- Glass fill station with 12.375" clearance
- Self-closing, pull handle dispense action faucets.
- Built-in undercounter chiller CP2000-UCR
- Internal drain bucket
- Adjustable legs: 5" -6"
- Ships fully assembled for ease of installation

R290



Accessories

- Dispense levers:
 - ☐ CR-SDL-1: Single sanitary dispense lever that attaches to a self-closing faucet on unit. 1 per faucet. Great for self-service hands-free dispensing applications
- Casters:
 - ☐ CR-S14523-KIT*: Caster kit with 4 swivel casters; two with wheel locks and mounting hardware



Built into cabinet (included with purchase of unit):

- CP2000-R-UC-BH chiller
- CR-14FC water filter
- CO2 regulator and cylinder bracket



*Caster Kit accessory elevates cabinet 4.25" from floor, changing overall height of system to 56.5"


CCP2000-UCR-CBR

Free-Standing Sparkling & Chilled Still Water
Glass Filling Station



Scan for more resources!

Line Drawings

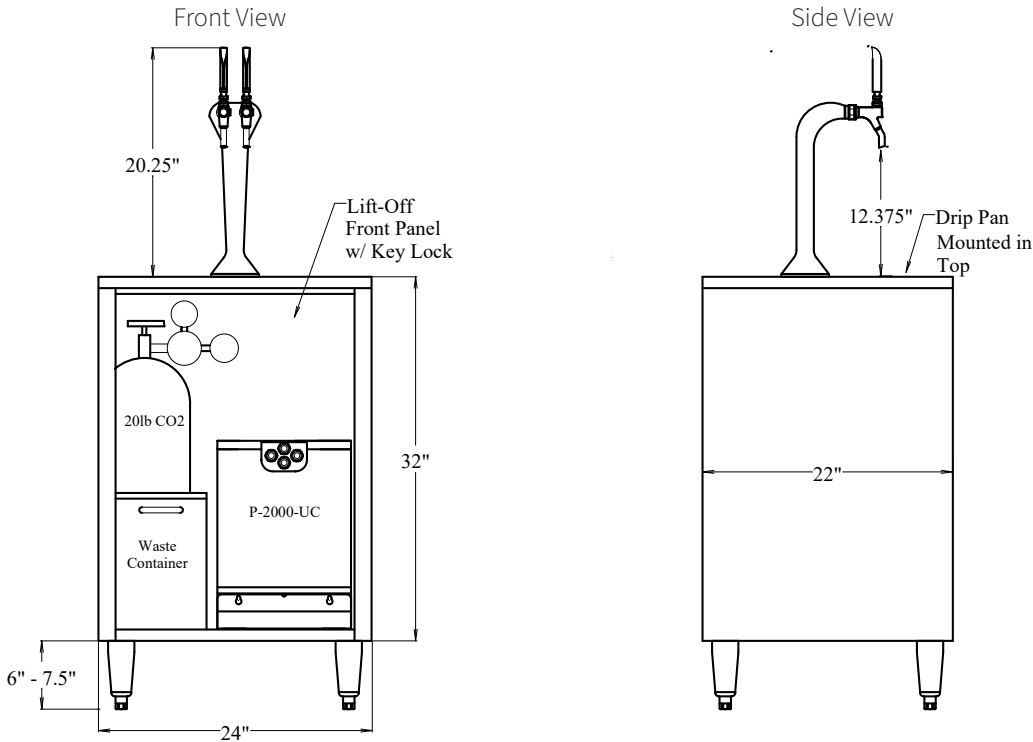

- Locking front access to components
- 12ft. water inlet tube, 3/8" OD x 1/4" ID with 3/8" John Guest bulk head in base of cabinet
- 6.5' Electrical cord
- Allow for 4" of clearance in rear and right side of cabinet for air flow
- Built-in CR-14FC water filter
- CO2 regulator included
- Compartment and strap for CO2 tank
- Stainless steel drain container 9" x 10" x 10"
- Do not block right side vents

Capacity	50, 12oz drinks/hour (<40°F)
Refrigerant	R290
Width	24"
Depth	22"
Height	57.25" - 58.25"
Cup fill clearance	12.375"
Compressor	1/9 H.P.

Carbonator	1.2 amp diaphragm pump
Operating temp	40°F-100°F
Electrical	120v - 3.62Amps
Water bath	2.5 gal
Ice bank	6 lbs
Weight	200 lbs