



**Collection**  
What inspires you?



# ***New Glass Filling Station with Built-in Water Filter!***

*see page 12 for details*

## *Table of Contents*



### **Artisan Water**

**3**

|                                              |    |
|----------------------------------------------|----|
| <i>Sizing Guide</i>                          | 4  |
| <i>Specifying Guide</i>                      | 5  |
| <i>Towers</i>                                | 6  |
| <i>Drain Pans</i>                            | 8  |
| <i>Remote Chillers</i>                       | 9  |
| <i>Countertop Systems</i>                    | 10 |
| <i>Glass Filling Stations &amp; Drop-Ins</i> | 12 |
| <i>Low Volume Systems</i>                    | 13 |
| <i>Instant Hot Water System</i>              | 14 |
| <i>Filtration &amp; Accessories</i>          | 15 |



### **Nitro Cold Brew**

**17**

|                                                  |    |
|--------------------------------------------------|----|
| <i>ProFusion Flex Systems &amp; Install Kits</i> | 18 |
| <i>Accessories</i>                               | 19 |



### **Helpful Resources**

**21**

|                                    |    |
|------------------------------------|----|
| <i>Installation Kit Breakdowns</i> | 21 |
| <i>Company Information</i>         | 23 |



## **Artisan Water**

|                                              |    |
|----------------------------------------------|----|
| <i>Sizing Guide</i>                          | 4  |
| <i>Specifying Guide</i>                      | 5  |
| <i>Towers</i>                                | 6  |
| <i>Drain Pans</i>                            | 8  |
| <i>Remote Chillers</i>                       | 9  |
| <i>Countertop Systems</i>                    | 10 |
| <i>Glass Filling Stations &amp; Drop-Ins</i> | 12 |
| <i>Low Volume Systems</i>                    | 13 |
| <i>Instant Hot Water System</i>              | 14 |
| <i>Filtration &amp; Accessories</i>          | 15 |

# Why Artisan Water?

At Crysalli, we believe great water elevates every beverage experience. Our artisan water systems are engineered to deliver chilled still and sparkling water that's not only refreshing, but also clean, consistent, and visually appealing, glass after glass. Whether you're serving premium cocktails, offering self-service hydration, or curating a craft beverage menu, Crysalli's systems provide the purity and performance you can taste. With flexible configurations, reliable carbonation, and a sleek design, our artisan water units outperform generic dispensers, helping you impress guests while reducing waste and operational costs.

## Sizing guide for artisan water systems

| Model                                             | Average Usage under 40° water                                                                                                      | Usage Type                                                                                                     | # of Seats/People                                       |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| CR-1 variations<br>CR-UCM1<br>CR-1MS<br>CR-UCM-MS | 37-50 liters per hour                                                                                                              | Bottle service or craft beverage                                                                               | Under 75 seats, 2-3 turns                               |
| CR-2 variations<br>CR-UCM2                        | Higher volume faster recover 68-80 liters per hour                                                                                 | Bottle service, craft beverage, cafeteria, split tower systems                                                 | 100 plus seats, high turn, or heavy short term peak use |
| CR-UCM2-2CL-S0096                                 | Higher volume faster recover 68-80 liters per hour                                                                                 | Long draw with lengths further than 45ft. Vertical trunkline runs longer than 15ft. Challenging trunkline runs | 100 plus seats, high turn, or heavy short term peak use |
| CP2000 series                                     | Filling glasses by the oz, less than a liter per draw. Repeated use of 50, 12 oz drinks per hour ave. or periodic bottle filling   | Service by the glass. Craft beverage. Coffee shops, cafes, wineries and offices                                | Less than 50 employees                                  |
| CR-CPS series                                     | Ice chilled cold plate. Manual fill, 40 lb ice storage. Melt off depends on usage. Heavy usage can require refilling every 30 min. | Self service only. Tight spaces where refrigeration based system cannot fit.                                   |                                                         |
| 2 valve towers and countertop models              |                                                                                                                                    | Typically used in full service, bottle service and craft beverage applications                                 |                                                         |
| 3 valve towers and push button (PB) models        |                                                                                                                                    | Typically used in self service applications                                                                    |                                                         |

## Features and benefits of countertop and remote chillers



### Countertop

- Stylish curved look with brushed stainless exterior
- 4 model sizes for different volume needs
- Minimal countertop space use for large volume systems
- Pull handle dispensing valve styles are great for wait staff service use
- Push button dispensing styles are ideal for self-service use
- Single piece of equipment package just add the filter system; easy install
- Self-contained refrigeration
- Easy service accessibility
- Average dispensing temps of 34-40°
- Cold carbonation for ideal sparkling water bubbles

### Remote and undercounter chillers

- Pair with different draft tower dispensing options
- Sleek CBR draft towers in chrome or black chrome
- Push button dispensing towers
- 3 model size remote and undercounter chillers
- Can be located up to 75' away from towers
- Remotely locating chiller reduces noise and heat
- Or they can be placed in a well ventilated cabinet
- A single remote chiller can operate two towers
- Average dispensing temps of 34-40°
- Cold carbonation for ideal sparkling water bubbles

# Specifying guide for artisan water systems

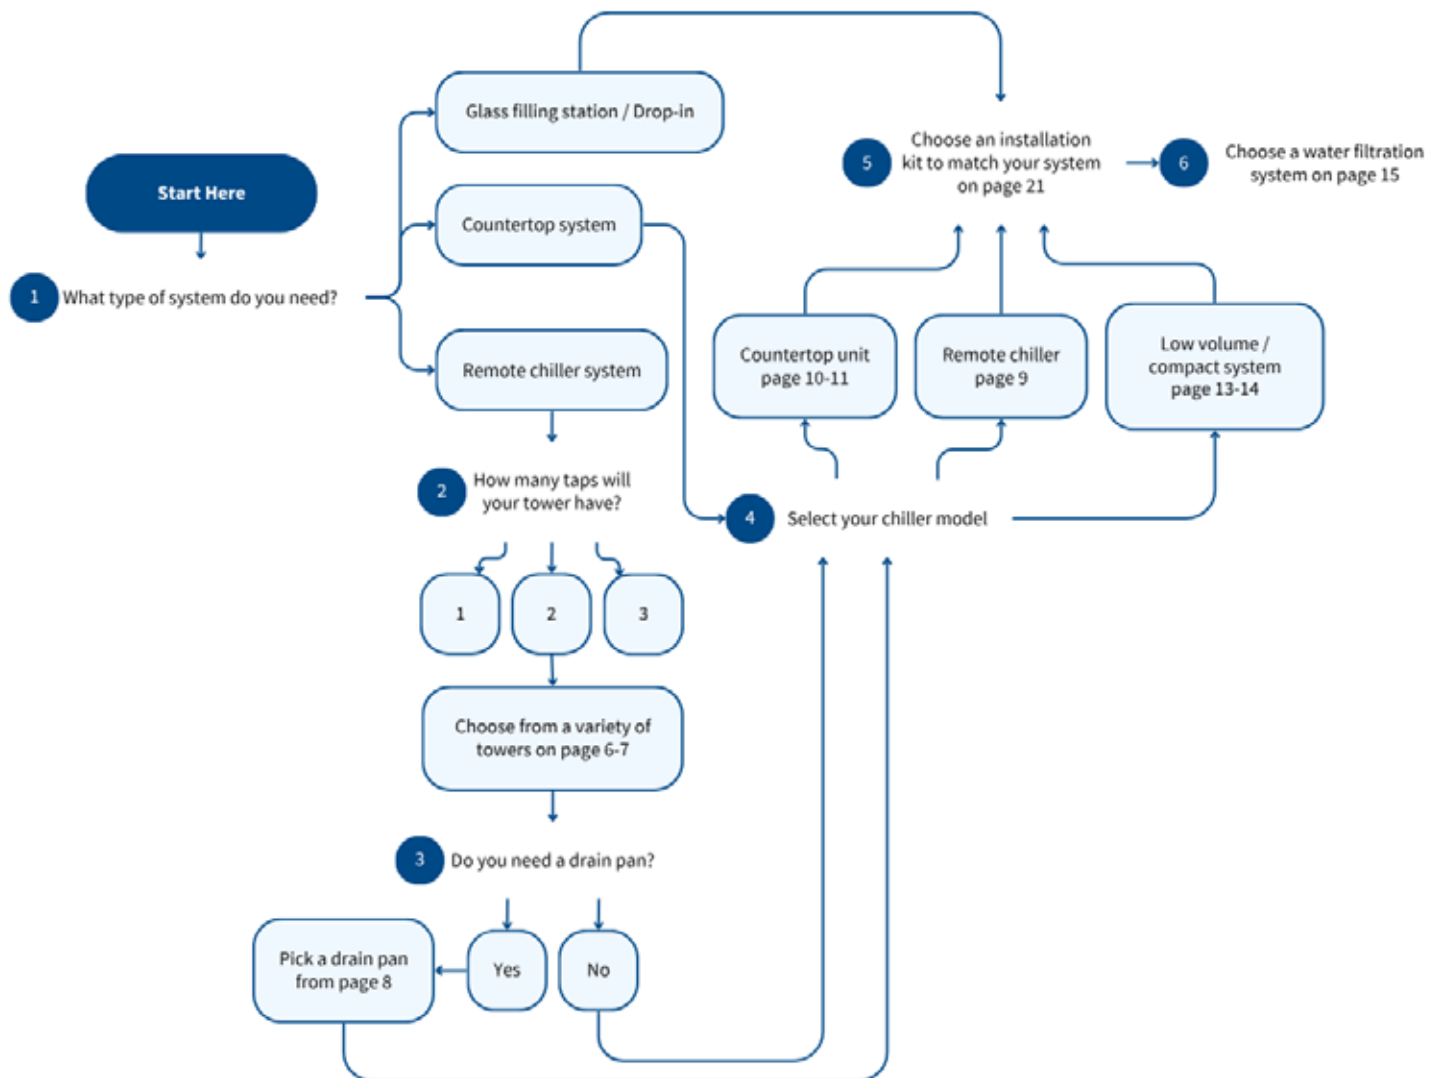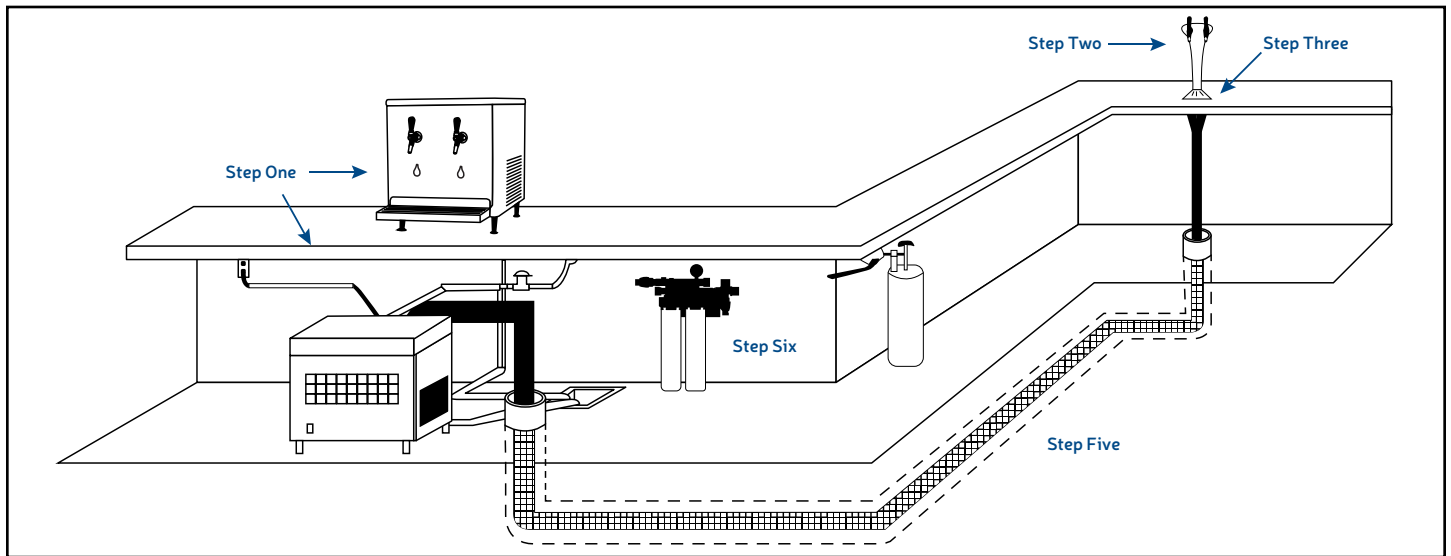

To have a complete system, you must go through all Steps 1-6

# Towers

Crysalli has various draft towers designed for use with Crysalli chillers that provide sparkling and chilled still water as well as pre-mix beverages. A variety of size and finishes will meet all your needs and style. Standard with SSX self-closing faucets and optional sanitary dispense lever kits. All CBR towers are NSF listed.



CBR-V1BLC-SSX



CBR-V1BLC-SDLX



CBR-V1C-SSX



CBR-V1C-SDLX



CBR-V1C-MINI-SSX



CBR-V2C-MINI-SSX

| Model              | Description                                                                          | Taps | Finish          | Height | Clearance | Weight |
|--------------------|--------------------------------------------------------------------------------------|------|-----------------|--------|-----------|--------|
| CBR-V1BLC-SSX      | Single valve, single product with SSX faucet                                         | 1    | Black<br>Chrome | 21"    | 12.375"   | 10 lbs |
| CBR-V1BLC-SDLX     | Single valve, single product with SSX faucet and sanitary dispense lever             | 1    | Black<br>Chrome | 21"    | 12.375"   | 10 lbs |
| CBR-V1C-SSX        | Single valve, single product with SSX faucet                                         | 1    | Chrome          | 21"    | 12.375"   | 10 lbs |
| CBR-V1C-SDLX       | Single valve, single product with SSX faucet and sanitary dispense lever             | 1    | Chrome          | 21"    | 12.375"   | 10 lbs |
| CBR-V1C-MINI-SSX   | Single valve, short height tower with SSX faucet                                     | 1    | Chrome          | 13.57" | 5.83"     | 8 lbs  |
| CBR-V2C-MINI-SSX   | Two valve, short height tower for sparkling and chilled still water with SSX faucets | 2    | Chrome          | 15.44" | 7.7"      | 11 lbs |
| CBR-V2BLC-MINI-SSX | Two valve, short height tower for sparkling and chilled still water with SSX faucets | 2    | Black<br>Chrome | 15.44" | 7.7"      | 11 lbs |



CBR-V2BLC-SSX



CBR-V2BLC-SDLX



CBR-V2C-SSX



CBR-V2C-SDLX

| Model          | Description                                                                                         | Taps | Finish          | Height | Clearance | Weight |
|----------------|-----------------------------------------------------------------------------------------------------|------|-----------------|--------|-----------|--------|
| CBR-V2BLC-SSX  | Two valve tower for sparkling and chilled still water with SSX faucets                              | 2    | Black<br>Chrome | 21"    | 12.375"   | 12 lbs |
| CBR-V2BLC-SDLX | Two valve tower for sparkling and chilled still water with SSX faucets and sanitary dispense levers | 2    | Black<br>Chrome | 21"    | 12.375"   | 12 lbs |
| CBR-V2C-SSX    | Two valve tower for sparkling and chilled still water with SSX faucets                              | 2    | Chrome          | 21"    | 12.375"   | 12 lbs |
| CBR-V2C-SDLX   | Two valve tower for sparkling and chilled still water with SSX faucets and sanitary dispense levers | 2    | Chrome          | 21"    | 12.375"   | 12 lbs |

Custom tower configurations and branded tap markers available, call 510.732.0100 for more details.

# Towers



CBR-V3BLC-SSX



CBR-V3BLC-SDLX



CBR-V3C-SSX



CBR-V3C-SDLX

| Model          | Description                                                                                                          | Taps | Finish       | Height | Clearance | Weight |
|----------------|----------------------------------------------------------------------------------------------------------------------|------|--------------|--------|-----------|--------|
| CBR-V3BLC-SSX  | Three valve tower for sparkling, chilled still and ambient still water with SSX faucets                              | 3    | Black Chrome | 21"    | 12.5"     | 16 lbs |
| CBR-V3BLC-SDLX | Three valve tower for sparkling, chilled still and ambient still water with SSX faucets and sanitary dispense levers | 3    | Black Chrome | 21"    | 12.5"     | 16 lbs |
| CBR-V3C-SSX    | Three valve tower for sparkling, chilled still and ambient still water with SSX faucets                              | 3    | Chrome       | 21"    | 12.5"     | 16 lbs |
| CBR-V3C-SDLX   | Three valve tower for sparkling, chilled still and ambient still water with SSX faucets and sanitary dispense levers | 3    | Chrome       | 21"    | 12.5"     | 16 lbs |



CM-V2W



CR-X3PB-COMP



CM-2PB

| Model        | Description                                                                                                          | Taps | Finish     | Width   | Depth | Height | Clearance | Weight |
|--------------|----------------------------------------------------------------------------------------------------------------------|------|------------|---------|-------|--------|-----------|--------|
| CM-V2W       | Two valve tower for sparkling and chilled still water, counter or wall mount                                         | 2    | Brushed SS | 10.69"  |       | 20.75" | 12"       | 10 lbs |
| CR-X3PB-COMP | Three button tower with single spout faucet for low volume applications only                                         | 1    | Chrome     |         |       | 12.5"  | 9"        | 8 lbs  |
| CM-2PB       | Two push button valves tower for sparkling and chilled still water, counter mount                                    | 2    | Brushed SS | 10.25"  | 8.75" | 18.5"  | 12"       | 11 lbs |
| CM-2PB-RDP   | Two push button valves tower for sparkling and chilled still water, counter mount with integrated recessed drain pan | 2    | Brushed SS | 10.625" | 10"   | 18.5"  | 12"       | 12 lbs |

Custom tower configurations and branded tap markers available, call 510.732.0100 for more details.

# Drain Pans

Crysalli drip tray and drain pans are made with our logo stamped into the tray to line up with the faucets of the countertop or draft tower and are manufactured of high grade stainless steel with a brushed finish.

Available in flush mount or counter mount configuration. Countertop configuration available with or without drain line. Made in USA and NSF listed.




RDP-3SSQ



RDP-1SSQ-1CL



RDP-1SSQ-2CL



DP-CT



DP-CT-LD

| Model        | Description                                                                                   | Width | Depth   | Height |
|--------------|-----------------------------------------------------------------------------------------------|-------|---------|--------|
| RDP-1SSQ-1CL | Flush mount, stainless drain pan and tower mount<br>Crysalli logo stamped for use with CBR-V1 | 12"   | 15.125" | 0.75"  |
| RDP-1SSQ-2CL | Flush mount, stainless drain pan and tower mount<br>Crysalli logo stamped for use with CBR-V2 | 12"   | 15.125" | 0.75"  |
| RDP-3SSQ     | Flush mount, stainless drain pan and tower mount<br>Crysalli logo stamped for use with CBR-V3 | 15"   | 18.125" | 0.75"  |
| DP-CT        | Stainless countertop mount drain pan, 0.5" drain pipe                                         | 10"   | 6"      | 0.75"  |
| DP-CT-LD     | Stainless countertop mount drip pan, no drain                                                 | 10"   | 6"      | 0.75"  |

Custom drain pan configurations available. Call 510.732.0100 for more details.

# Remote Chillers

## Quiet Power. Flexible Dispensing. Now More Eco-Friendly.

Tuck the remote chiller unit out of sight to minimize noise and heat while enjoying maximum flexibility with a range of dispensing tower options. Choose from our sleek CBR draft towers—available in a variety of stylish finishes—or push-button dispensing towers. Available in three model sizes, Crysalli's remote chillers can be discreetly installed in a well-ventilated cabinet or up to 75 feet away from the tower. Perfect for serving chilled still and/or sparkling water to multiple tower locations, all units now feature eco-friendly R290 refrigerant for a more sustainable beverage solution.



CR-UCM1



CR-UCM-MS  
CR-UCW-BH



CR-UCM2  
CR-UCM2-SW-2



CR-UCM2-2CL-S0096  
CR-UCM2-SW-2-S0096

| Model              | Description                                                                                       | Production | Width | Depth  | Height | Weight  |
|--------------------|---------------------------------------------------------------------------------------------------|------------|-------|--------|--------|---------|
| CR-UCM1            | Sparkling and chilled still water. Standard with two water coils. 35ft max trunk line run         | 50 LPH     | 12"   | 23.5"  | 24.5"  | 115 lbs |
| CR-UCM-MS          | Midsized. Sparkling and chilled still water. 10ft max trunk line run                              | 37 LPH     | 12.5" | 18.75" | 24.5"  | 80 lbs  |
| CR-UCW-BH          | Chilled still water only. 35ft max trunk line run                                                 | 37 LPH     | 12.5" | 18.75" | 24.5"  | 70 lbs  |
| CR-UCM2            | Sparkling and chilled still water. Standard with two water coils. 45ft max trunk line run         | 80 LPH     | 20"   | 20"    | 20"    | 165 lbs |
| CR-UCM2-SW-2       | Chilled still water only. For multi tower applications. 45ft max trunk line run                   | 68 LPH     | 20"   | 20"    | 20"    | 135 lbs |
| CR-UCM2-2CL-S0096* | Sparkling and chilled still water. Two coil, high capacity external pump. 75ft max trunk line run | 80 LPH     | 20"   | 20"    | 20"    | 165 lbs |
| CR-UCM2-SW-2-S0096 | Chilled still water only. Two coil, high capacity external pump. 75ft max trunk line run          | 68 LPH     | 20"   | 20"    | 20"    | 150 lbs |

Production quantity is determined on an hourly basis while maintaining a water temperature of <40°F

For Crysalli remote chillers using reverse osmosis water, add -RO to the end of the model number and call for pricing.

Additional coils are also available upon request for wine, coffee, and other beverage applications. Call for pricing.

## Required Install Kits *see page 21 for more details*

| Model       | Description                                                                       |
|-------------|-----------------------------------------------------------------------------------|
| CR-KIT-UCM  | Installation kit for: CR-UCM1, CR-UCM-MS, CR-UCM2, CR-UCM2-2CL, CR-UCM2-2CL-S0096 |
| CR-KIT-SWUC | Installation kit for: CR-UCW-BH, CR-UCM2-SW-2, CP2000-SW-BH, CR-UCM2-SW-2-S0096   |

## Optional Install Kits *see page 21 for more details*

| Model          | Description                                                                                        |
|----------------|----------------------------------------------------------------------------------------------------|
| CBR2-FKM-V2    | Installation kit for plumbing an additional dispensing tower with two valves to a single chiller   |
| CBR2-FKM-V3    | Installation kit for plumbing an additional dispensing tower with three valves to a single chiller |
| *CR-L5-30P-8FT | NEMA L5-30 power cord 125VAC, 10 gage, 30AMP for remote chiller CR-UCM2-2CL-S0096                  |

# Countertop Systems

## Stylish. Compact. Now More Sustainable.

Our countertop dispense systems are thoughtfully designed to deliver refreshing sparkling and chilled still water—perfect for nearly any occasion or setting. These self-contained units feature an integrated cold carbonation system and come with your choice of pull-handle faucets for staff service or push-button valves ideal for self-serve environments. Engineered to take up minimal counter space while delivering premium ingredient water, each unit comes standard with two valves for chilled still and sparkling water, with an optional third valve for ambient still water. Now featuring eco-friendly R290 refrigerant for a cleaner, greener beverage experience.



CR-1  
CR-1MS  
CR-1SW



CR-1-3V



CR-1PB  
CR-1SW-PB



CR-1PB-3V

| Model     | Description                                                                 | Production | Width   | Depth  | Height | Clearance | Weight  |
|-----------|-----------------------------------------------------------------------------|------------|---------|--------|--------|-----------|---------|
| CR-1      | Sparkling and chilled still water. Two pull handle faucets                  | 50 LPH     | 12.375" | 31"    | 24.5"  | 12"       | 115 lbs |
| CR-1MS    | Midsized. Sparkling and chilled still water. Two pull handle faucets        | 37 LPH     | 12.5"   | 25.75" | 24.5"  | 12"       | 85 lbs  |
| CR-1SW    | Midsized. Chilled still water only. Two pull handle faucets                 | 37 LPH     | 12.5"   | 25.75" | 24.5"  | 12"       | 75 lbs  |
| CR-1-3V   | Sparkling, chilled still and ambient still water. Three pull handle faucets | 50 LPH     | 12.375" | 31"    | 24.5"  | 12"       | 115 lbs |
| CR-1PB    | Sparkling and chilled still water. Two push button valves                   | 50 LPH     | 12.375" | 31"    | 24.5"  | 12"       | 115 lbs |
| CR-1SW-PB | Chilled still water only. Two push button valves                            | 37 LPH     | 12.375" | 23.75" | 24.5"  | 12"       | 65 lbs  |
| CR-1PB-3V | Sparkling, chilled still and ambient still water. Three push button valves  | 50 LPH     | 12.375" | 31"    | 24.5"  | 12"       | 115 lbs |

Sanitary dispense levers are compatible with countertop pull handle units. Add quantity 1 of CR-SDL-1 to your order for each faucet. See pg 15 for more details  
Production quantity is determined on an hourly basis while maintaining a water temperature of <40°F.  
Mirrored finish stainless steel available. Call for pricing and availability.

## Required Install Kits *see page 21 for more details*

| Model       | Description                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------|
| CR-KIT-CT   | Installation kit for: CR-1, CR-1MS, CR-1-3V, CR-1PB, CR-1PB-3V, CR-2, CR-2-3V, CR-2PB, CR-2PB-3V |
| CR-KIT-SWCT | Installation kit for: CR-1SW, CR-1SW-PB, CR-2SW, CR-2SW-PB                                       |

# Countertop Systems

**R290**



CR-2  
CR-2SW



CR-2-3V



CR-2PB  
CR-2SW-PB



CR-2PB-3V

| Model     | Description                                                                 | Production | Width | Depth | Height | Clearance | Weight  |
|-----------|-----------------------------------------------------------------------------|------------|-------|-------|--------|-----------|---------|
| CR-2      | Sparkling and chilled still water. Two pull handle faucets                  | 80 LPH     | 20"   | 28"   | 24.75" | 12"       | 165 lbs |
| CR-2SW    | Chilled still water only. Two pull handle faucets                           | 68 LPH     | 20"   | 28"   | 24.75" | 12"       | 135 lbs |
| CR-2-3V   | Sparkling, chilled still and ambient still water. Three pull handle faucets | 80 LPH     | 20"   | 28"   | 24.75" | 12"       | 165 lbs |
| CR-2PB    | Sparkling and chilled still water. Two push button valves                   | 80 LPH     | 20"   | 26"   | 24.75" | 12"       | 165 lbs |
| CR-2SW-PB | Chilled still water only. Two push button valves                            | 68 LPH     | 20"   | 26"   | 24.75" | 12"       | 135 lbs |
| CR-2PB-3V | Sparkling, chilled still and ambient still water. Three push button valves  | 80 LPH     | 20"   | 28"   | 24.75" | 12"       | 165 lbs |

Sanitary dispense levers are compatible with countertop pull handle units. Add quantity 1 of CR-SDL-1 to your order for each faucet. See pg 15 for more details

Production quantity is determined on an hourly basis while maintaining a water temperature of <40°F

For Crysalli countertop chillers using reverse osmosis water, add -RO to the end of the model number and call for pricing.

Mirrored finish stainless steel available. Call for pricing and availability.

## Required Install Kits see page 21 for more details

| Model       | Description                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------|
| CR-KIT-CT   | Installation kit for: CR-1, CR-1MS, CR-1-3V, CR-1PB, CR-1PB-3V, CR-2, CR-2-3V, CR-2PB, CR-2PB-3V |
| CR-KIT-SWCT | Installation kit for: CR-1SW, CR-1SW-PB, CR-2SW, CR-2SW-PB                                       |

# Glass Filling Stations & Drop-Ins

## Engineered for Performance. Built for Impact.

Crysalli offers a versatile lineup of durable, commercial-grade stainless steel freestanding and drop-in cabinet systems—each designed to deliver refreshing sparkling and chilled still water with consistent quality and reliability. Depending on the model, these systems feature up to 40 pounds of ice storage, integrated water filtration, CO2 regulation, and an ice-cooled cold plate that flash chills water to 34°–40°F. Every pour is delivered through our signature Crysalli CBR draft tower, ensuring both performance and presentation that elevates any environment.



CR-GFS-V1L



CR-CPSW-DI



CR-CPS-DI



CR-CPS-FS



CCP2000-UCR-CBR

| Model           | Description                                                                                                                                                            | Storage       | Width  | Depth  | Height | Clearance | Weight  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|--------|--------|-----------|---------|
| CR-GFS-V1L      | Drop-in. Filtered ambient still water glass station. Built-in water filter system with CBR-V1C-SDLX tower                                                              |               | 9.5"   | 14.75" | 33.75" | 12.375"   | 19 lbs  |
| CR-CPSW-DI      | Drop-in. Ice cooled still water glass filling station. 40 lb cold plate system with CBR-V1C-SSX tower                                                                  | 40 lbs of ice | 17.13" | 24.9"  | 40"    | 12.5"     | 90 lbs  |
| CR-CPS-DI       | Drop-in. Ice cooled sparkling & still water glass filling station. 40 lb cold plate system with CBR-V2C-SSX tower                                                      | 40 lbs of ice | 17"    | 25"    | 50.75" | 12.5"     | 115 lbs |
| CR-CPS-FS       | Free-standing. sparkling & still water glass filling station. 40 lb cold plate system with CBR-V2C-SSX tower                                                           | 40 lbs of ice | 17"    | 24"    | 62.75" | 12.5"     | 115 lbs |
| CCP2000-UCR-CBR | CP2000-UCR-BH, CBR-V2C-SSX and drain pan integrated into a stainless steel cabinet with built-in water filter and CO2 tank mount. Plug and play design. For low volume |               | 24"    | 22"    | 58.25" | 12.5"     | 200 lbs |

## Required Install Kits *see page 21 for more details*

| Model      | Description                                            |
|------------|--------------------------------------------------------|
| CR-KIT-CPS | Installation kit for: CR-CPS-DI, CR-CPS-FS, CR-CPSW-DI |

# Low Volume Systems

## Compact Convenience. Cold Carbonation. Now More Sustainable.

Designed for low-volume applications, the CP2000 Series features an integrated cold carbonation system and a built-in recirculation pump, allowing for undercounter installation up to 6 feet from the dispense tower. The countertop models are quiet, space-saving, and engineered for environments where footprint matters. Each unit delivers refreshing sparkling and chilled still water at an average temperature of 34°–40°F—perfect for office spaces, cafés, and breakrooms. Now featuring eco-friendly R290 refrigerant for a more sustainable, energy-efficient solution.



CP2000-R-UC-BH  
CP2000-SW-BH

CP2000-CT2

CP2000-CT3

CP2000-CT2-PB

CP2000-CT3-PB

| Model          | Description                                                                                             | Production               | Width  | Depth | Height | Clearance | Weight |
|----------------|---------------------------------------------------------------------------------------------------------|--------------------------|--------|-------|--------|-----------|--------|
| CP2000-R-UC-BH | Undercounter chiller unit. Sparkling and chilled still water. 6' maximum recirculating trunkline length | (50) 12 oz cups per hour | 11.75" | 17.5" | 16.5"  |           | 80 lbs |
| CP2000-SW-BH   | Undercounter chiller unit. Chilled still water only. 6' maximum recirculating trunkline length          | (50) 12 oz cups per hour | 11.75" | 17.5" | 16.5"  |           | 75 lbs |
| CP2000-CT2     | Countertop pull handle faucets. Sparkling and chilled still water                                       | (50) 12 oz cups per hour | 12"    | 26"   | 20.75" | 9"        | 80 lbs |
| CP2000-CT3     | Countertop pull handle faucets. Sparkling, chilled still and ambient still water                        | (50) 12 oz cups per hour | 12"    | 26"   | 20.75" | 9"        | 80 lbs |
| CP2000-CT2-PB  | Countertop push button valves. Sparkling and chilled still water                                        | (50) 12 oz cups per hour | 12"    | 21.5" | 20.75" | 9"        | 80 lbs |
| CP2000-CT3-PB  | Countertop push button valves. Sparkling, chilled still and ambient still water                         | (50) 12 oz cups per hour | 12"    | 21.5" | 20.75" | 9"        | 80 lbs |

Sanitary dispense levers are compatible with countertop pull handle units. Add quantity 1 of CR-SDL-1 to your order for each faucet. See pg 15 for more details  
Production quantity is determined on an hourly basis while maintaining a water temperature of <40°F.  
Mirrored finish stainless steel available. Call for pricing and availability.

## Required Install Kits *see page 21 for more details*

| Model       | Description                                                                |
|-------------|----------------------------------------------------------------------------|
| CR-KIT-CPCT | Installation kit for: CP2000-CT2, CP2000-CT2-PB, CP2000-CT3, CP2000-CT3-PB |
| CR-KIT-CPUC | Installation kit for: CP2000-R-UC-BH and CP2000-SW-BH                      |

# Low Volume Systems



Serenity-X3



Serenity-CBRM



CP-JR-CT2FR-K



CP-JR-CT2FR-PB-K

| Model             | Description                                                                                                                                               | Production              | Width   | Depth   | Height  | Clearance | Weight |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------|---------|---------|-----------|--------|
| Serenity-X3       | Undercounter chiller system kit with CR-X3PB faucet, CR-12FC filter system install kit and leak detector device                                           | (40) 8 oz cups per hour | 10.5"   | 14.375" | 18.125" | 9"        | 60 lbs |
| Serenity-CBRM     | Undercounter chiller system kit with CBR mini tower, CR-12FC filter system install kit and leak detector device                                           | (40) 8 oz cups per hour | 10.5"   | 14.375" | 18.125" | 7.7"      | 60 lbs |
| CP-JR-UC-SW-BH-K  | Undercounter chilled still water only. Includes complete install kit with water filter and leak block sensor                                              | (40) 8 oz cups per hour | 10.5"   | 14.375" | 18.125" |           | 60 lbs |
| CP-JR-CT2FR-K     | Countertop, two pull handle faucets. Built-in filter. Includes complete install kit with water filter, leak block sensor and water pressure reducer valve | (40) 8 oz cups per hour | 10.625" | 21.25"  | 17"     | 8"        | 60 lbs |
| CP-JR-CT2FR-PB-K  | Countertop, two push button valves. Built-in filter. Includes complete install kit with water filter, leak block sensor and water pressure reducer valve  | (40) 8 oz cups per hour | 10.75"  | 18.125" | 17"     | 7.375"    | 60 lbs |
| CP-JR-CT1SWF-K    | Countertop chilled still only, single pull handle faucet. Filter built in. Includes complete install kit with water filter and leak block sensor          | (40) 8 oz cups per hour | 10.625" | 21.25"  | 17"     | 8"        | 60 lbs |
| CP-JR-CT1SWF-PB-K | Countertop chilled still only, single push button valve. Filter built in. Includes complete install kit with water filter and leak block sensor           | (40) 8 oz cups per hour | 10.75"  | 18.125" | 17"     | 7.375"    | 55 lbs |

Sanitary dispense levers are compatible with countertop pull handle units. Add quantity 1 of CR-SDL-1 to your order for each faucet. See pg 15 for more details  
 The Serenity and CP-JR units have an installation kit included in the purchase.  
 Production quantity is determined on an hourly basis while maintaining a water temperature of <40°F.  
 Mirrored finish stainless steel available. Call for pricing and availability.

## Instant Hot Water System

| Model           | Description                                                                                                                                                                                                                  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CR-HOT300-SSD-K | Instant hot water system with swivel spout hot water faucet, stainless steel water heater, and water filter system. Includes complete install kit with water pressure reducing valve, angle stop adapter, fittings, and hose |



CR-HOT300-SSD-K

# Filtration & Accessories

## Filtration



| Model            | Description                                                                                                                                                                           |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CR-24FC          | Twin filter system with compact Fibredyne filters, 3/4" inlet & outlet. 17" width x 19" height. 5 gpm, 30,000 gal, TOC & 1/2 micron filtration                                        |
| CR-24FCP         | Twin filter system with pre-filter and Fibredyne filters, 3/4" inlet & outlet. 21.75" width x 19.25" height. 5 gpm, 30,000 gal, TOC & 1/2 micron filtration                           |
| CR-14FC          | Single filter system with compact Fibredyne filters, 3/8" inlet & outlet. 8" width x 18" height. 2.5 gpm, 15,000 gal, TOC & 1/2 micron filtration. For the CP2000 series only         |
| CR-14FCP         | Single filter system with pre-filter and Fibredyne filters, 3/8" inlet & outlet. 14" width x 15" height. 2.5 gpm, 15,000 gal, TOC & 1/2 micron filtration. For the CP2000 series only |
| 4FC              | Replacement water filter. High capacity 15,000 gallon. Fibredyne cartridge                                                                                                            |
| 2FC              | Replacement water filter. 6,000 gallon capacity. Compact Fibredyne cartridge. For the CP-JR models only                                                                               |
| ECP5-10          | Replacement water filter. Pleated pre-filter. 10 inches                                                                                                                               |
| CR-2.5X10PLTD-AG | Replacement water pre-filter, electropositive fibrous filter media with high particle removal efficiency as well as high dirt holding capacity. 10 inches                             |

Additional and custom configured water filtration systems for individual water quality needs are available.  
The use of non Crysalli-approved water filter systems can result in undesirable water quality and product performance.

## Accessories



| Model                     | Description                                                                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| CR-SDL-1                  | Sanitary dispense lever for use with SSX0101-HEX-SC and X0101-B-HEX on CR-1 and CR-2 countertop units and CM-V2W. Lever only                      |
| CR-SDL-SSX1               | Sanitary dispense lever with self closing SSX0101-HEX-SC faucet and shank, for retro fit on CBR and other draft towers. Lever with SSX0101 faucet |
| X100306C CHROME SPARKLING | Ergonomic chrome tap handle. Sparkling water graphic                                                                                              |
| X100306C CHROME STILL     | Ergonomic chrome tap handle. Chilled still water graphic                                                                                          |
| X100306C CHROME CHILLED   | Ergonomic chrome tap handle. Still water graphic                                                                                                  |
| CR-MDLN-V1                | For CBR-V1, one straight medallion holder. Specify water type                                                                                     |
| CR-MDLN-V2                | For CBR-V2, two straight medallion holders. Sparkling and chilled still                                                                           |
| CR-MDLN-V3                | For CBR-V3, three straight medallion holders. Sparkling, chilled and ambient still                                                                |

# Accessories



CR-ABUCM



CR-TFB1



CR-L5-30P-8FT



CR-WMB1



CR-WMB2



CR-WMB-18X18SS



CR-804-002



CR-804-023



CR-804-026



CR-LBS10JG




S0747-SET



S1318-SET



PASVPP6



CR-CTAC-2CK



CR-CWB1



CR-CWB2



CR-4L38



CR-PC160-14FCV



CR-S115-14FCV



CR-OFF-CP



CR-OFF-1



CR-OFF-2

## Model

## Description

|                |                                                                                                                                           |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| CR-ABUCM       | Air baffle accessory kit for remote chillers CR-UCM1, CR-UCM-MS, CR-UCM2, and CR-UCW-BH                                                   |
| CR-TFB1        | Thermostatic fan box for additional air circulation in cabinets, use with remote chillers                                                 |
| CR-L5-30P-8FT  | NEMA L5-30 power cord 125VAC, 10 gage, 30AMP for remote chiller CR-UCM2-2CL-S0096                                                         |
| CR-WMB1        | Wall mounting bracket for the CR-UCM1, CR-UCM-MS & CR-UCW-BH                                                                              |
| CR-WMB2        | Wall mounting bracket for the CR-UCM2 series remote chillers                                                                              |
| CR-WMB-18X18SS | Wall mounting bracket for the CR-804-023 and CR-804-026 water boost system                                                                |
| CR-804-002     | Low volume water boost system. 21 oz. accumulator tank, 1 amp max                                                                         |
| CR-804-023     | Medium water boost system, 2 gal accumulator tank, replaceable bladder, 1 amp max                                                         |
| CR-804-026     | Water boost system, 6 gal accumulator tank, replaceable bladder, 1 amp max                                                                |
| CR-LBS10JG     | In-line leak detector with auto shut-off. For use with any Crysalli chiller system (Included in install kits)                             |
| S0747-SET      | 4.25" leg kit. (Standard legs on the CR-UCM1, CR-UCM-MS, CR-UCW-BH, CR-1, and CR-2 series chillers)                                       |
| S1318-SET      | Adjustable cushion feet. (Standard feet on the CR-UCM2, CP2000-R-UC-BH, and CP2000-SW-BH series chillers)                                 |
| PASVPP6        | Angle stop adapter splice                                                                                                                 |
| CR-BPFBK       | Crysalli water filter system bypass fitting kit                                                                                           |
| CR-CTAC-2CK    | CO2 cylinder auto change device. Includes hoses with check valves fittings, wall bracket and CR-PC160 high pressure primary CO2 regulator |
| CR-CWB1        | One CO2/N2 gas cylinder safety wall bracket                                                                                               |
| CR-CWB2        | Two CO2/N2 gas cylinder safety wall bracket                                                                                               |
| CR-4L38        | Four 3/8" lines in insulated 2" diameter trunk line. Two product lines, and re-circulating lines                                          |
| CR-PC160-14FCV | Primary CO2 regulator. High pressure 160 PSI 1/4" flare with check valve, nylon flare and cylinder washer                                 |
| CR-S115-14FCV  | Single secondary CO2 regulator. Mid-pressure 115 PSI with 1/4" flare HP inlet capped HP outlet with shut off                              |
| CR-OFF-CP      | Aluminum utility spill tray for CP-JR-UC, CR-UCM-MS, CP2000-UC & CR-UCW-BH undercounter chillers (15.875" x 21.75" x 1")                  |
| CR-OFF-1       | Aluminum utility spill tray for CR-UCM1 chillers (18" x 25.875" x 1")                                                                     |
| CR-OFF-2       | Plastic utility spill tray for CR-UCM2 & CR-UCM2-2CL chillers (22"x 22" x 1.5")                                                           |



## ***Nitro Cold Brew***

*ProFusion Flex Systems*  
*Accessories*

*18*  
*19*

# ProFusion Flex Systems

Give your customers more than a drink. Give them an experience.

The ProFusion Flex allows you to dispense two beverages from one keg or RTD BIB, offering your customers a cold drink as it is from the keg or BIB as it is, and also Profused with nitrogen. When you Profuse a beverage with nitrogen, you transform it into a special experience of watching it cascade in the glass while enhancing the flavors and providing a silky texture experience as it's sipped. Go ahead and flex your beverage muscle and give your customers a Pro beverage experience.



iN2-TK2P-P  
iN2-TK2P-D



iN2-DD2P-P  
iN2-DD2P-D



CR-1-iN2-2P



CP2000-CT2-iN2-2P

| Model             | Description                                                                                                         | Width  | Depth   | Height | Clearance | Weight  |
|-------------------|---------------------------------------------------------------------------------------------------------------------|--------|---------|--------|-----------|---------|
| iN2-2P            | ProFusion Flex injection device                                                                                     | 10.5"  | 4.5"    | 12.75" |           | 60 lbs  |
| iN2-TK2P-P        | ProFusion beverage dispensing tapping kit with premix tank couplers                                                 | 10.5"  | 4.5"    | 12.75" | 8"        | 60 lbs  |
| iN2-TK2P-D        | ProFusion beverage dispensing tapping kit with "D" style keg coupler                                                | 10.5"  | 4.5"    | 12.75" | 8"        | 60 lbs  |
| iN2-DD2P-P        | ProFusion beverage dispensing direct draw system with premix tank couplers                                          | 24"    | 30.125" | 49.25" | 8"        | 174 lbs |
| iN2-DD2P-D        | ProFusion beverage dispensing direct draw system with "D" style keg coupler                                         | 24"    | 30.125" | 49.25" | 8"        | 174 lbs |
| CR-1-iN2-2P       | ProFusion beverage dispensing countertop system in brushed stainless steel                                          | 12.38" | 27.5"   | 25"    | 8.5"      | 115 lbs |
| CP2000-CT2-iN2-2P | ProFusion beverage dispensing countertop system. Available in brushed stainless steel, white, or matte black finish | 12"    | 26"     | 21.5"  | 8.5"      | 75 lbs  |

## Required Install Kits *see page 21 for more details*

| Model             | Description                                                                  |
|-------------------|------------------------------------------------------------------------------|
| CR-KIT-CR1-iN2-P  | Installation kit for: CR-1-iN2-2P with premix tank couplers                  |
| CR-KIT-CR1-iN2-D  | Installation kit for: CR-1-iN2-2P with "D" style keg coupler                 |
| CR-KIT-CPCT-iN2-P | Installation kit for: CP2000-CT2-iN2-2P with premix tank couplers            |
| CR-KIT-CPCT-iN2-D | Installation kit for: CP2000-CT2-iN2-2P with "D" style keg coupler           |
| CR-KIT-CT-iN2-BIB | Installation kit for: CR-1-iN2-2P & CP2000-CT2-iN2-2P with BIB rack assembly |

# Accessories



CR-PMT-2.5G



CR-PMT-5G



CR-10-1591



CR-BLC-G



CR-BLC-L



CR-220DSS



CBR-V2C-N2G26



CR-F2S-G26SS-N2



CLM-V2-N2




CR-G26SS



CR-1663



CR-PN60-516BSO



CR-NTAC-2CK



CR-CWB1



CR-CWB2



CR-RP2FAW



CR-RP3FAW

| Model           | Description                                                                                                                                 |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| CR-PMT-2.5G     | Premix tank, ball lock coupler style, 2.5 gallon                                                                                            |
| CR-PMT-5G       | Premix tank, ball lock coupler style, 5 gallon                                                                                              |
| CR-10-1591      | 1-2 cold brew system cleaner and sanitizer                                                                                                  |
| CR-BLC-G        | Inlet gas ball lock coupler, coupler for pre-mix tanks                                                                                      |
| CR-BLC-L        | Outlet liquid ball lock coupler, coupler for pre-mix tanks                                                                                  |
| CR-220DSS       | Stainless steel "D" style keg coupler, for standard domestic kegs                                                                           |
| CBR-V2C-N2G26   | Two faucet chrome CBR tower with nitro taps                                                                                                 |
| CR-F2S-G26SS-N2 | Industrial style, stainless steel, two tap pipe tower with N2 faucets                                                                       |
| CLM-V2-N2       | 3" column tower with 304 stainless steel stout style faucets. NSF listed                                                                    |
| CR-G26SS        | 304 stainless steel stout style faucet for N2 beverages, no shank                                                                           |
| CR-1663         | 304 stainless steel shank with fittings. For use with CR-G26SS faucet                                                                       |
| CR-PN60-516BSO  | Primary regulator for nitrogen tank. 0-60 PSI, 5/16" Barbed outlet fitting and shut off valve                                               |
| CR-NTAC-2CK     | N2 tank auto changeover device, 2 cylinder kit. Comes with two 36" hoses, two tank wrenches, wall mount bracket, and a primary N2 regulator |
| CR-CWB1         | One CO2/N2 gas cylinder safety wall bracket                                                                                                 |
| CR-CWB2         | Two CO2/N2 gas cylinder safety wall bracket                                                                                                 |
| CR-RP2FAW       | Two product reg panel, with hoses and fittings                                                                                              |
| CR-RP3FAW       | Three product reg panel, with hoses and fittings                                                                                            |

# Accessories

## Mixing Bases




CMS9-950-701




CMS12-950-702



CMBS-950-705



CMBS-950-706



CMBS-950-707



CMBS-950-708



CMBS-950-710



CMBS-950-709



CMBS-950-712

| Model         | Description                                                                              |
|---------------|------------------------------------------------------------------------------------------|
| CMS9-950-701  | 9" Single base system to include a 9" base, 2 amp power supply and spin bar              |
| CMS12-950-702 | 12" Single base system to include a 12" base, 2 amp power supply and spin bar            |
| CMBS-950-705  | Power supply, 12VDC 2 amp. For use with one mixing base                                  |
| CMBS-950-706  | Power supply, 12VDC 6 amp. For use with power splitter, to connect multiple mixing bases |
| CMBS-950-707  | Power splitter to connect up to 4 mixing bases to one 6 amp power supply CMBS-950-706    |
| CMBS-950-708  | Power extension, 12'                                                                     |
| CMBS-950-709  | 9" mixing base, less power supply and spin bar                                           |
| CMBS-950-710  | Spin bar magnet 2" for pre-mix keg. Order at least one per mixing base                   |
| CMBS-950-712  | 12" mixing base, less power supply and spin bar                                          |

# Installation Kit Breakdowns

| Model             | Description                                                                                                                                                                                                                                                               |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CR-KIT-CT         | Installation kit for: CR-1, CR-1MS, CR-1-3V, CR-1PB, CR-1PB-3V, CR-2, CR-2-3V, CR-2PB, CR-2PB-3V<br>Includes: LBS-10JG leak block sensor, fittings and oetiker clamps and extra tubing to install the filter systems and countertop unit                                  |
| CR-KIT-UCM        | Installation kit for: CR-UCM1, CR-UCM-MS, CR-UCM2, CR-UCM2-2CL-S0096<br>Includes: LBS-10JG leak block sensor, 5 ft of CR-4L38 trunkline, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower       |
| CR-KIT-SWCT       | Installation kit for: CR-1SW, CR-1SW-PB, CR-2SW, CR-2SW-PB<br>Includes: LBS-10JG leak block sensor, various fittings and oetiker clamps, and extra tubing. Chilled still water units only                                                                                 |
| CR-KIT-SWUC       | Installation kit for: CR-UCW-BH, CR-UCM2-SW-2, CP2000-SW-BH<br>Includes: LBS-10JG leak block sensor, 5 ft of CR-4L38 trunkline, various fittings and oetiker clamps, adapters, and extra tubing. Chilled still water units only                                           |
| CR-KIT-CPS        | Installation kit for: CR-CPS-DI, CR-CPS-FS, CR-CPSW-DI<br>Includes: water filter fittings, angle stop adaptor and 8 ft 3/8" hose                                                                                                                                          |
| CR-KIT-CPCT       | Installation kit for: CP2000-CT2, CP2000-CT2-PB, CP2000-CT3, CP2000-CT3-PB<br>Includes: LBS-10JG leak block sensor, water pressure reducer valve, fittings needed to complete the installation of CR-14FC filter system to countertop CP2000's, and extra tubing          |
| CR-KIT-CPUC       | Installation kit for: CP2000-R-UC-BH and CP2000-SW-BH<br>Includes: LBS-10JG leak block sensor, water pressure reducer valve, fittings needed to complete the installation of CR-14FC filter system to remote chiller CP2000-R-UC-BH and tower or faucet, and extra tubing |
| CBR2-FKM-V2       | Fittings kit for adding a second CBR-V2C or other 2 valve dispenser tower off the trunkline from a single UCM remote chiller                                                                                                                                              |
| CBR2-FKM-V3       | Fitting kit for adding a second CBR-V3C or other 3 valve dispenser tower off the trunkline from a single UCM remote chiller                                                                                                                                               |
| CR-L5-30P-8FT     | NEMA L5-30 power cord 125VAC, 10 gage, 30AMP for remote chiller CR-UCM2-2CL-S0096                                                                                                                                                                                         |
| CR-KIT-CR1-IN2-P  | Installation kit for: CR-1-iN2-2P with premix tank couplers<br>Includes: CR-PN60 primary nitrogen regulator, plumbing connections, and includes two premix tank connections (gas and liquid)                                                                              |
| CR-KIT-CR1-IN2-D  | Installation kit for: CR-1-iN2-2D with "D" style keg coupler<br>Includes: CR-PN60 primary nitrogen regulator, plumbing connections, and includes one D style keg connector                                                                                                |
| CR-KIT-CPCT-IN2-P | Installation kit for: CP2000-CT2-iN2-2P with premix tank couplers<br>Includes: CR-PN60 primary nitrogen regulator, plumbing connections, and two premix tank connections (gas and liquid)                                                                                 |
| CR-KIT-CPCT-IN2-D | Installation kit for: CP2000-CT2-iN2-2P with "D" style keg coupler<br>Includes: CR-PN60 primary nitrogen regulator, plumbing connections, and one D style keg connector                                                                                                   |
| CR-KIT-CT-iN2-BIB | Installation kit for CR-1-iN2-2P & CP2000-CT2-iN2-2P with BIB rack assembly.<br>Includes: CR-PN60 primary nitrogen regulator, plumbing connections, and BIB rack assembly sized for "illy®" ready to drink (RTD) cold brew BIB                                            |





## **Mission:**

Crysalli strives for excellence as leaders, educators, innovators and producers of water and other high quality beverage dispensing equipment.

## **Vision:**

- Maintain a pure and simple focused approach to our equipment and customer experiences.
- Proactive empowerment, innovation and ownership of customer solutions.
- Pay attention to the details.
- Treat everyone as we desire to be treated.
- Never let profits get in the way of doing the right thing.
- Build and maintain enduring relationships.
- Continual education and personal improvements.
- Take the time to enjoy a cold glass of sparkling water.
- Have fun and enjoy selling and supporting Crysalli.

---

### **Product Styles**

#### **Commercial remote chillers**

- Sparkling and chilled still
- Chilled still only
- Used with draft tower options

#### **Commercial countertop chillers**

- Sparkling and chilled still
- 2 and 3 valve configurations
- Chilled still only

#### **Low volume CP series**

- Undercounter chillers
- Countertop chillers

**Always include an install kit with new installation systems**

**Always include water filtration system with new installations**

- Contact your local distributor for replacement water filter cartridges

*Specifications in this catalog are subject to change without prior notice*

### **Warranty**

- **Commercial warranty: 1 year parts and labor**
  - Crysalli systems must be used with approved install kit, water filtration, and dispensing towers to be eligible for warranty coverage
- **All Serenity and JR units: 1 year parts 90 days labor**
- **Residential warranty: 90 days parts only (effective 1/1/2027)**

### **Prices**

- Prices are FOB Hayward, California
- All prices and specifications are subject to change without notice
- All weights and measurements shown herein are approximate
- Product found in AutoQuotes
- Contact factory for Minimum Advertised Price (MAP) policy

### **Resources**

- Available in AutoQuotes
- Available in KCL
- CAD files
- 3D CAD files
- REVIT files

### **Return of Product**

Prior authorization must be granted by Crysalli before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 30 days. Equipment approved for return is subject to a 25% restocking charge.

Returned equipment must be shipped freight prepaid, packed in original carton, and received in good condition.





## Why Crysalli?

- Made in the USA
- 1 year parts and labor warranty
- All units 120 volts
- NSF/ETL and UL approved
- City of LA approved
- Detailed installation and fitting kits
- CO2 regulators and other accessories
- Comprehensive install instructions
- Multiple dispensing tower selections
- Custom built models and configurations available
- Local availability and support via a nationwide network of distribution companies
- Nationwide network of installers and service companies available

Crysalli Beverage Systems  
1739 Sabre Street  
Hayward, CA 94545  
[www.crysalli.com](http://www.crysalli.com)  
510.732.0100

