

Project:



**Scan for more info!**

Owners manual  
Quick install  
Quick sizing  
Install layout  
Parts list

## CR-14FCP

### Multi-Stage Water Filter System




- Intended for use with CP2000 Series and CR-UCW-BH still water system
- Compact size fits under the counter
- Removes the bad tastes, chlorine, odors, colors and particles as small as 0.2 micron, while retaining the good minerals that are essential for bottle quality tasting water at a flow rate of 2.5 gpm. System includes pre-filtration to remove larger particles and extend the life of the primary filters, great for high dirt content water areas.

### Specifications

- 2 Stage System
- 10" Pleated Cellulose Pre-filter
- 4FC High Capacity Cartridge
  - Advanced Fibredyne technology
  - Quick Change sanitary cartridge
  - Recyclable
  - High Capacity, Extended filter life
- Flow Rate: 2.5 GPM
- Rated Capacity: 15,000 Gallons
- Inlet Connection: 3/4"
- Outlet Connection: 3/8"
- Pressure Requirements: 40-125 psi
- No Electrical connection
- Manifold features water shut-off, flushing valve and water pressure gauge
- 14.254"W x 6.13"D x 15.23"H

## SPECIFICATIONS

System	Performance
<b>Overall Dimensions</b> 18" H x 8" W x 5.25" D (47.7 cm x 20.4 cm x 13.4 cm)	<b>Service Flow Rate</b> 2.5 gpm (9.46 lpm)
<b>Connections</b> Inlet Connection: 3/4" FNPT Outlet Connection: 3/8" FNPT	<b>Rated Capacity</b> 15,000 gallons (57,781 L)
<b>Operating Pressure</b> 50- 125 psi (0.7 - 8.6 bar)	<b>Chlorine Taste &amp; Odor Reduction</b> Yes
<b>Water Temperature</b> 35 - 100°F (2 - 38°C)	<b>Particulate Reduction</b> Yes
<b>Operating Weight</b> 12 lbs (3.7 kgs)	<b>Bacteriostatic Effects</b> Yes
<b>Shipping Weight</b> 9 lbs (2.3 kgs)	<b>Cyst Reduction</b> Yes
<b>Electrical Connection</b> None required	<b>Turbidity Reduction</b> Yes

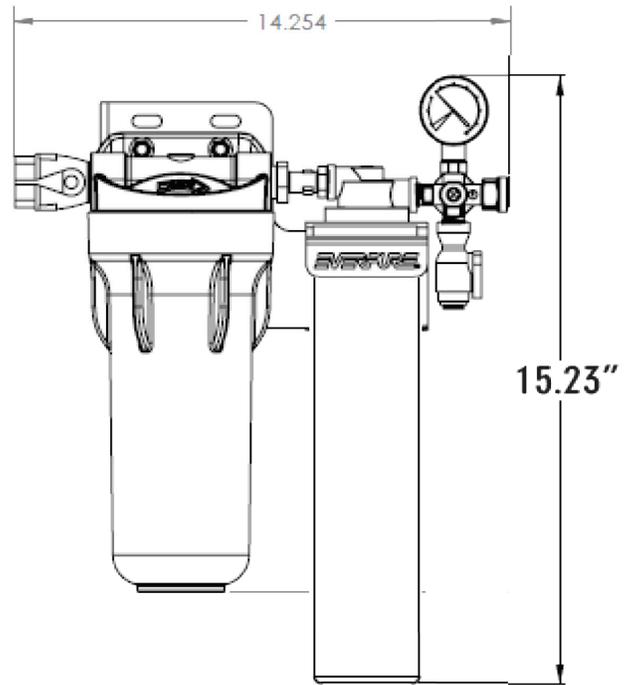

Water Inlet: 3/4" FPT

Water Outlet : 3/8" FPT

## Features & Benefits:

- Increased capacity for extended reduction of chemical and mechanical contaminants
- Balanced cartridge for optimum performance in varying water qualities
- New Fibredyne II media with AgION antimicrobial protection inhibits any potential bacterial growth
- Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages
- Improves the taste of fountain beverages and helps retain the drink's carbonation
- Submicron technology reduces dirt and particles smaller than 1/2 micron in size, and reduces health contaminants such as Cryptosporidium and Giardia cysts
- Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
- Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination
- Fibredyne technology creates a unique filter media by attaching powdered activated carbon onto a cellulose-free synthetic fiber matrix
- Benefits of this technology include low pressure drop over the entire life of the cartridge and up to three times the chlorine taste & odor and dirt-holding capacity of traditional 2 or 3 stage carbon block filter systems
- In addition, Fibredyne's technology will not release fines into the effluent stream due to a unique postfiltration layer that is fused to the carbon/fiber media blend
- Certified under NSF/ANSI standards 42 and 53 through Everpure
  - NSF/ANSI Standard 42 certified for bacteriostatic effects and the reduction of chlorine taste & odor, and particulate class I
  - NSF/ANSI Standard 53 certified to reduce cysts such as cryptosporidium and giardia by mechanical means



Certified under Everpure

