



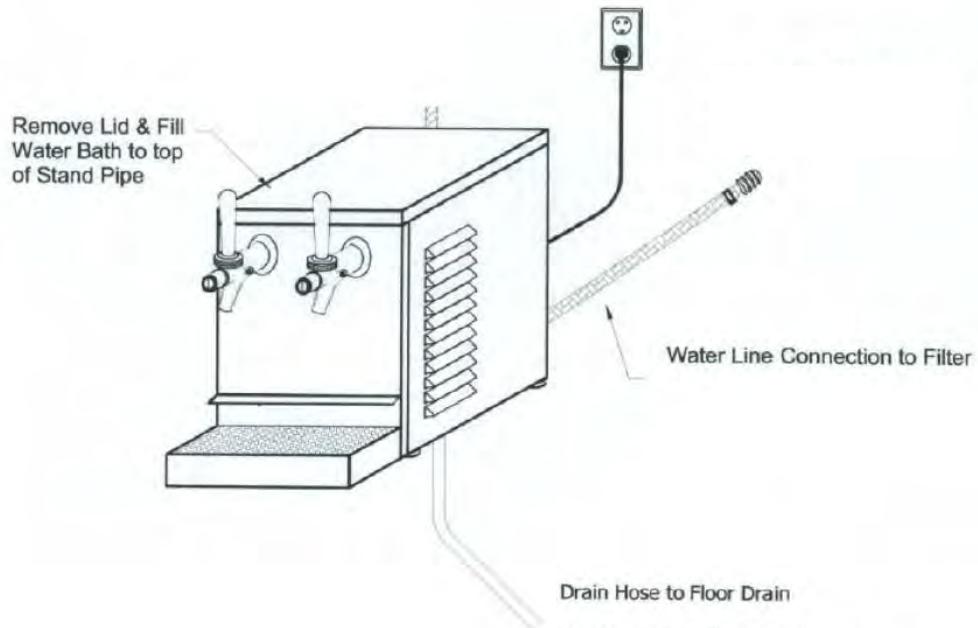

1739 Sabre St.  
Hayward, CA 94545  
800-229-4410 [www.crysalli.com](http://www.crysalli.com)

## CR-1SW & CR-2SW Still Chilled Water Countertop Quick Install Guide

1. Select a location for your chilled water dispenser. Place unit as close as possible to water filter connection & 120-volt electrical outlet. Make sure there is sufficient space at the back and between the unit and walls and overhead for proper air circulation and to access the air filter.
2. **Install Water Filter Assembly:** Mount the CR-24FC water filter assembly on wall or other supporting structure or in side cabinet near the angle stop. Connect water filter assembly to the angle stop water supply line using minimum 3/8" I.D. water line. The outlet hose of the filter system should also be 3/8". CR-24FC filter head assembly has a 3/4" fmp inlet and outlet which must be reduced down. Flush water filter system per filter instructions to purge air.
3. **Water inlet Connection:** Run your 3/8" water line from your water filter system to the CR-2SW. The CR-2SW has a 3/8" push-in John Guest fitting at the bottom of it. This fitting will accept a 3/8" OD hose. Push in hose into fitting till it stops, then pull back a little to make sure it is secure.
4. **Overflow Drain line:** The clear 1/2" hose out the bottom is the overflow drain hose which should be run to a floor drain or other waste drain.
5. **Fill Water Bath:** Remove lid of the unit and fill water bath with non-filtered tap water, fill to 1/4" from top of white standpipe. This is the white tube in the water bath connected to overflow hose. The unit will not work without water bath filled.
6. Turn on Water. Check connections for leaks.
7. Plug unit power cord into 120-volt outlet. Toggle the ON/OFF rocker switch to the ON position. Fan and compressor will turn on. Fan and Compressor will automatically turn off when a complete ice bank is made and cycle on and off to maintain it.
8. Pull open the still water faucets to run water through the system. Set adjustment arms located on the side of the faucets in a horizontal position for full flow. Adjust this little arm up or down to restrict water flow as desired.
9. Unit will take between 3 & 4 hours to make a complete ice bank in the water bath area. Once unit has built the ice bank you are ready to dispense chilled still water.

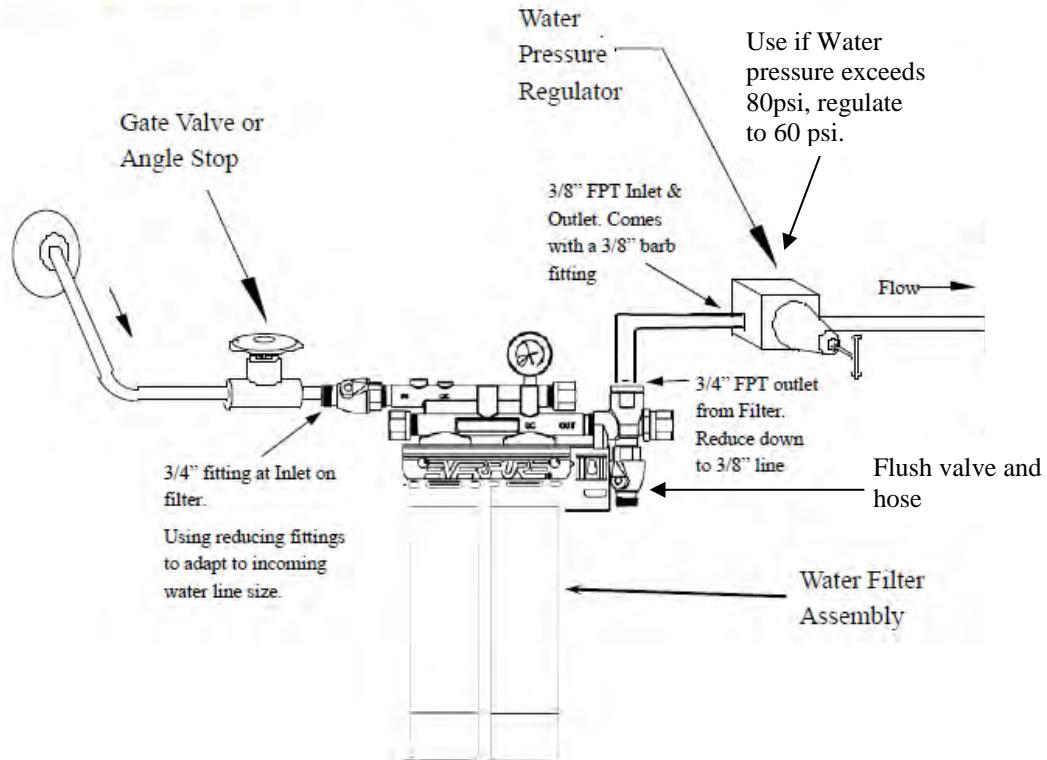




## CR-KIT-SWCT Itemized Content

QTY	Description		Usage
3	JG 90 3/8" smooth to 3/8"	PP221212W	Bottom Water Inlet fitting & filter conenctions.
1	3/8 Tube x 9/26-24 Female Adapter	PSEI6012U9	quick connect fitting adaptor to the the anglestop
2	JG tube fitting 3/8 JG to 1/2	PP062012W	Adaptor reducers for filter system inlet and outlet
2	JG 3/4 mpt to 1/2 push-in.	PSEI012026	Adaptor reducers for filter system inlet and outlet
3	JG locking locking rings	PIC1812R	To lock Collet of JG fittings
1	12' sections of Blue 3/8" OD tubing	PE-12-EI	12' Water inlet hose, in and out of filter to chiller
1	6' section of 3/8" ID Clear BIB hose		For extending the clear drain line hose
3	15.7 Oetiker Clamps	15.7-706R	For crimping drain splice barb fitting
1	Splice Barb 3/8" to 3/8"	19-0209	to add additional drain line
4	8" Zip Ties		to secure the tubing

This Kit is designed to supply you with the fittings & parts you may need to complete the install of our Reference the Crysalli Coutnertop system Quick Install Guide for part usage and install details CR-24FC Filter system to a Crysalli Countertop CR series with 3/8 John Guest Water Inlet Fitting.

Connections: The Water Inlet is the 3/8" Quick Connect fitting on the bottom of the chiller. Use the PP221212W  
The Clear hose is the overflow Drain hose  
Water bath must be manaully filled with water.

Inlett connection

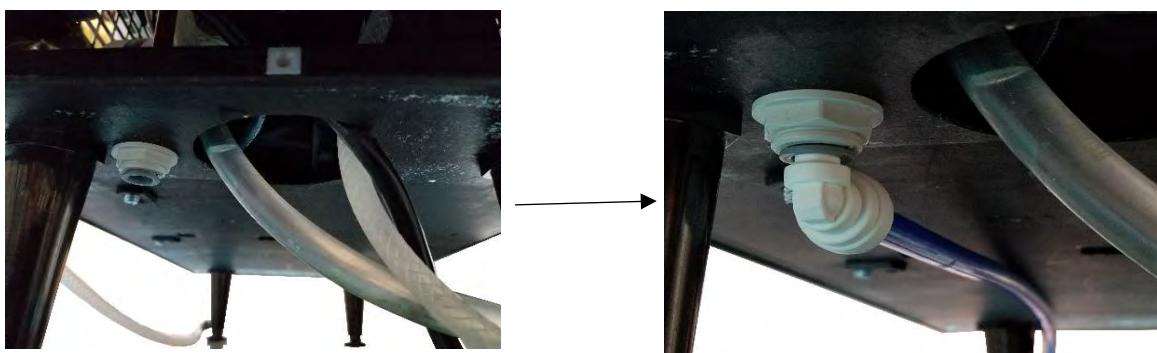

Optionally Available: CR-LBS10-JG inline leak detector and auto water shut off.

For questions or assistance with install contact Crysalli 510-732-0100 or your local Distributor.