

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CBDS-P2000-R-UC
Remote Beverage Chiller




Fountain Dispense Cold Carb Chiller

- Undercounter recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean, stainless steel cabinet
- 304 stainless steel brushed finish panels
- Reduced counter space need compared to cold plate systems

Specifications

- Dispense capacity: 1, 12 oz drink per minute (Max capacity: 50, 12 oz drinks at this duty cycle)
- Flow rate: 3 oz per second
- Dispense temperature: <40°F
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Refrigerant: R134a CFC-free
- Electrical: 120 VAC
- Minimum amps: 4.5

- Cold carbonation technology
- Carbonator pump: 1 GPM (max pressure 160 PSI)
- Built-in re-circulatory pump allows for an installation distance up to 6' between chiller and dispenser
- Water Bath: 2.5 Gallons
- Ice Bank: 6 lbs
- Dry Weight: 80 lbs
- 11.75"W x 17.5"D x 16.5"H
- CBDS-P2000-R-UC-BH-R4 and R-6 are reverse osmosis compatible

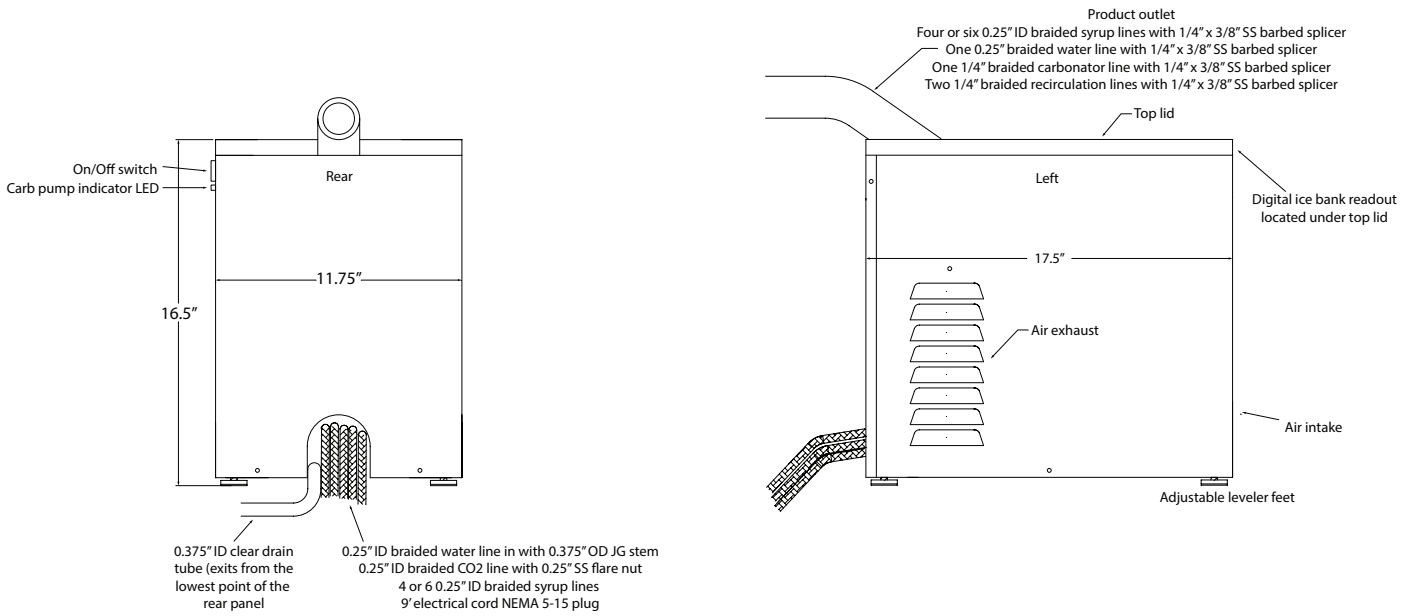

	CBDS-P2000-R-UC-R4	CBDS-P2000-R-UC-R6
Coil quantity	4 syrup coils	6 syrup coils
Coil description	6 foot stainless steel tubing 0.25" OD with 0.02" wall	

Accessories:

- **CR-14FCP with Prefilter**
- **CR-14FC without Prefilter**
Filtration systems feature one 4FC Fibredyne technology, quick change, sanitary cartridge. T.O.C. capacity 15,000 gal at 2.5 GPM.



- **CBDS-KIT-P2000-R4/6**
Kit includes fittings, tubing, clamps and insulation to complete the installation of the Crysalli filter system to the remote chiller, trunkline, bar gun or Crysalli dispense tower.



- **CR-PC160-14FCV**
- **Customer supplied CO2 tank required**
Primary high pressure CO2 regulator for CO2 cylinder



- **CR-CWB1**
- **CR-CWB2**
Cylinder safety restraint wall bracket



- **CR-4V-BIB-KIT**
- **CR-6V-BIB-KIT**
Backroom kit, 4 or 6 BIB pumps, two wide by two high flat shelves



- **CBDS-06002**
- **CBDS-08002**
Insulated bundle with barrier tubing (six or eight 3/8" OD product and two 3/8" recirc)



- **CM-T-4V-PBV**
- **CM-T-6V-PBV**
Four or six valve, postmix soda, "T" tower with LED dispense buttons and an integrated base and drip pan



- **CR-TFB1**
Thermostatic fan box recommended anytime a remote chiller is installed in a cabinet

