

Project:



Scan for more info! Owners manual Quick install Quick sizing Install layout Parts list

## **CBDS-UCM1** Remote Beverage Chiller



## Fountain Dispense Cold Carb Chiller

- Remote recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean stainless steel cabinet
- 304 stainless steel brushed finish panels
- Reduced counter space need compared to cold plate systems


## **Specifications**

- Dispense capacity: 2, 12 oz drinks per minute (Max capacity: 80, 12 oz drinks at this duty cycle)
- Flow rate: 3 oz per second
- Dispense temperature: <40°F
- Self-contained refrigeration system
- Compressor: 1/5 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,2000 per hour average
- Electrical: 120 VAC
- Minimum amps: 9.6

- Cold carbonation technology
- Carbonator: 1.67 GPM (100 GPH)
- Water Bath: 4 Gallons
- Ice Bank: 9.5 lbs
- Weight: 115 lbs
- Built-in re-circulatory pump allows for an installation distance up to 35' between tower and chiller
- 12"W x 23.5"D x 24.5"H

Product outlet

Four or six 0.25" ID braided syrup lines with 1/4" x 3/8" SS barbed splicer One 0.25" braided water line with 1/4" x 3/8" SS barbed splicer One 1/4" braided carbonator line with 1/4" x 3/8" SS barbed splicer

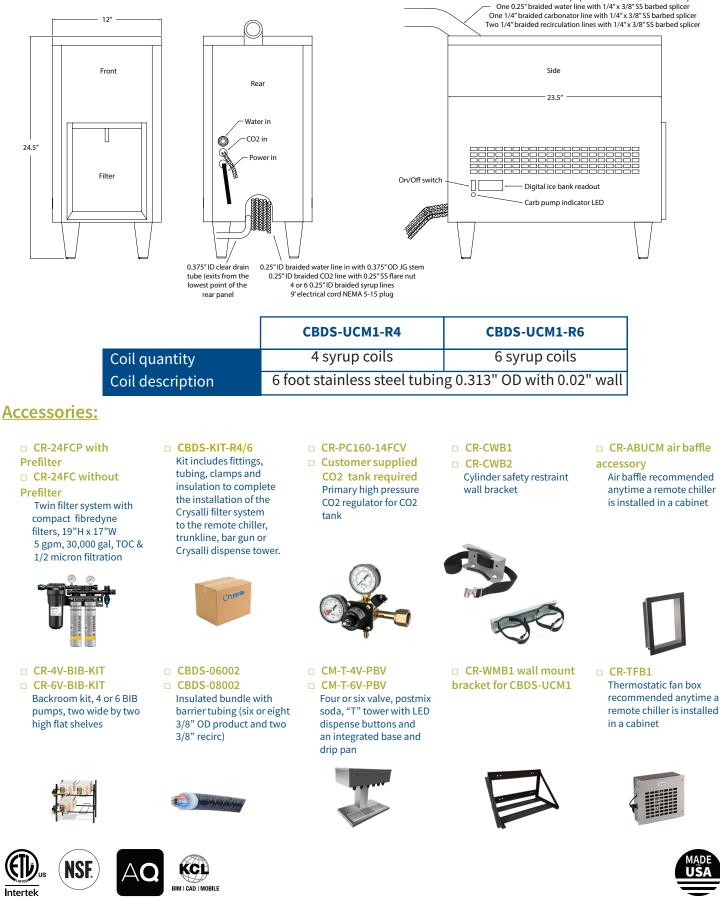

Crysalli Beverage Systems a division of WPD 1739 Sabre Street, Hayward, CA 94545

www.crysalli.com

510.732.0100 CR07292022