

Project:



Scan for more info! Owners manual Quick install Quick sizing Install layout Parts list

CBDS-UCM2-2CL Remote Beverage Chiller




Fountain Dispense Cold Carb Chiller

- Remote recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser(s)
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean stainless steel cabinet
- 304 stainless steel brushed finish panels
- Reduced counter space need compared to cold plate systems

Specifications


- Dispense capacity: 3, 12 oz drinks per minute (Max capacity: 145, 12 oz drinks at this duty cycle)
- Flow rate: 3 oz per second
- Dispense temperature: <40°F
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,600 per hour average
- Electrical: 120 VAC
- Minimum amps: 15

- Cold carbonation technology
- Carbonator: 1.67 GPM (100 GPH)
- Water Bath: 6 Gallons
- Ice Bank: 25 lbs
- Weight: 165 lbs
- Built-in re-circulatory pump allows for an installation distance up to 45' between tower and chiller
- 20"W x 20"D x 20"H

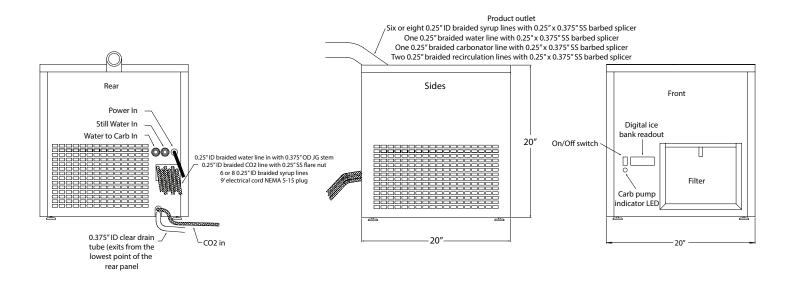

| | CBDS-UCM2-2CL-R6 | CBDS-UCM2-2CL-R8 |
|------------------|---|------------------|
| Coil quantity | 6 syrup coils | 8 syrup coils |
| Coil description | 6 foot stainless steel tubing 0.313" OD with 0.02" wall | |

Accessories:

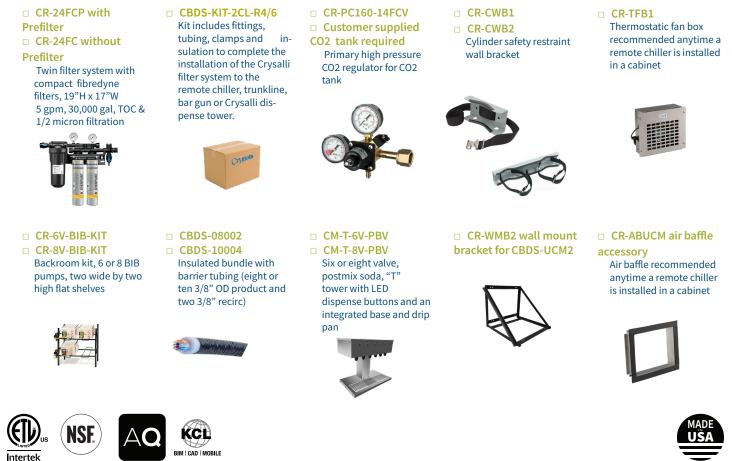

Crysalli Beverage Systems a division of WPD 1739 Sabre Street, Hayward, CA 94545

www.crysalli.com



510.732.0100 CR07292022