

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CBDS-UCM2-SW-2CL

Remote Beverage Chiller




Fountain Dispense Non-carb Chiller

- Remote recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser(s)
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean stainless steel cabinet
- Reduced counter space need compared to cold plate systems

Specifications

- Dispense capacity: 3, 12 oz drinks per minute
 (Max capacity: 145, 12 oz drinks at this duty cycle)
- Flow rate: 3 oz per second
- Dispense temperature: <45°F
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,400 per hour average
- Electrical: 120 VACMinimum amps: 7.7

- Water Bath: 6 Gallons
- Ice Bank: 25 lbs
- Weight: 135 lbs
- Built-in re-circulatory pump allows for an installation distance up to 45' between tower and chiller
- 20"W x 20"D x 20"H

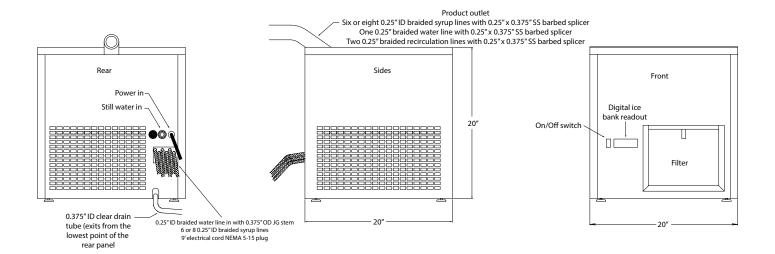

	CBDS-UCM2-SW-2CL-6	CBDS-UCM2-SW-2CL-8
Coil quantity	6 syrup coils	8 syrup coils
Coil description	6 foot stainless steel tubing 0.313" OD with 0.02" wall	

Accessories:

□ CR-24FCP with **Prefilter** □ CR-24FC without **Prefilter**

Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



□ CBDS-08002 □ CBDS-10004

Insulated bundle with barrier tubing (eight or ten 3/8" OD product and two 3/8" recirc)

□ CBDS-KIT-SW-2CL-6 □ CBDS-KIT-SW-2CL-8

Kit includes: Beverage hose, stainless steel fittings, barbed splicers, U-bend, oetiker clamps, John Guest fittings, leak block detector, insulation tape, etc.

□ CR-TFB1

Thermostatic fan box recommended anytime a remote chiller is installed in a cabinet

□ CR-ABUCM air baffle accessory

Air baffle recommended anytime a remote chiller is installed in a cabinet

□ CR-6V-BIB-KIT □ CR-8V-BIB-KIT

Backroom kit, 6 or 8 BIB pumps, two wide by two or four high flat shelves



□ CM-T-6V-PBV □ CM-T-8V-PBV

Six or eight valve, postmix soda, "T" tower with LED dispense buttons and an integrated base and drip



□ CR-WBM-6-JD

□ CR-WBM-8-JD 6 or 8 product, non-carb water.



□ CR-WMB2 wall mount bracket for CBDS-UCM2















