

Project:



**Scan for more info!**

Owners manual  
Quick install  
Quick sizing  
Install layout  
Parts list

## **CR-HOT300-SSD-K** Instant Hot Water System



### **Instant Hot Water On Tap** **Single Spout Water Tower**

Chrome finish, lead-free single spout hot water faucet.


Undercounter instant hot water heater tank. All stainless steel construction. Features an adjustable digital temperature control delivering up to 208°F hot water with 2.4 liter reservoir tank.

Water filter features advanced submicron technology water filter, which reduces chlorine taste, odors, color, organic chemicals, inhibits limescale, and is NSF certified to remove particles as small as 1/2 micron.



### **Specifications**

- Swivel spout hot water faucet
- Adjustable flow control with 1/4" turn ceramic disc valve for filling pitchers
- NSF/ANSI Standard 61
- Stainless steel water heater
- Digital temp display with power and heat level indicator lights
- 122°F-208°F range in 1° increments
- 1300 watt stainless steel heating element
- 120V 10.8 Amp. 5' cord and plug
- Installs off cold water feed from filter
- Quick connect 1/4" filter head assembly
- Sanitary quick change filter cartridge
- Fibredyne II woven carbon filter technology
- Submicron cyst removal rated
- 1.5 Gallon per minute
- 6,000 Gallon filtering capacity
- NSF Standard 42 and 53
- Install kit with 50 PSI water pressure reducing valve, angle stop adapter, fittings, and hose

## Faucet

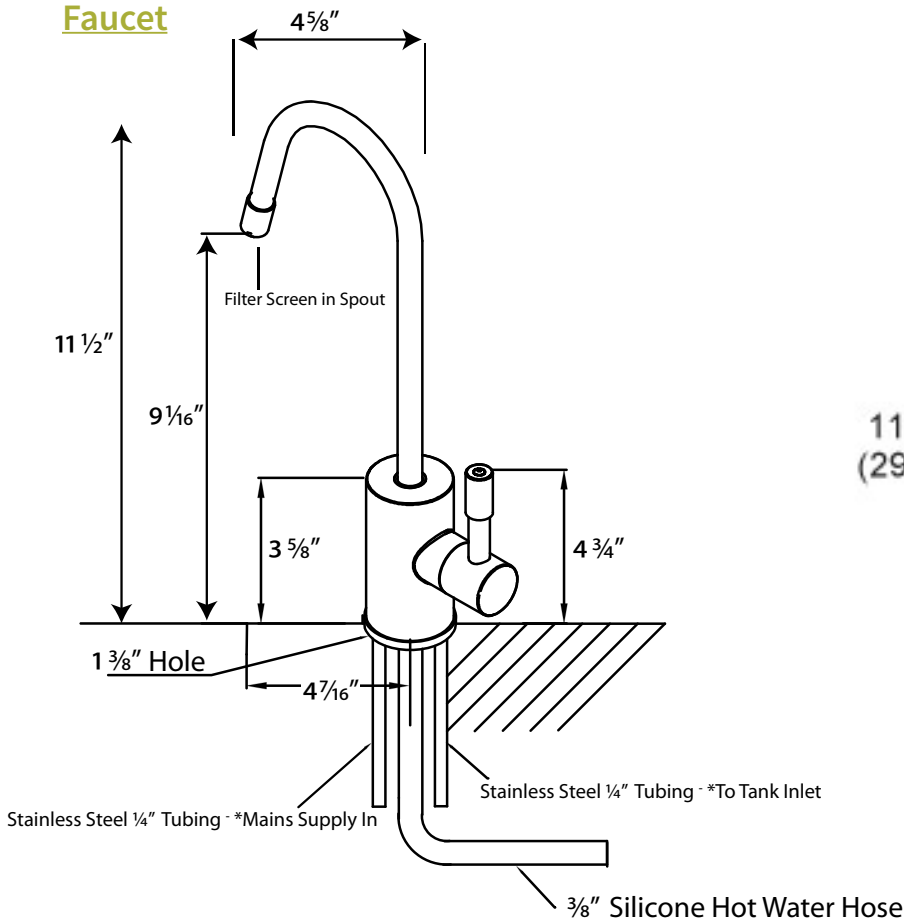

## Heater

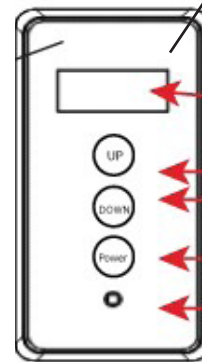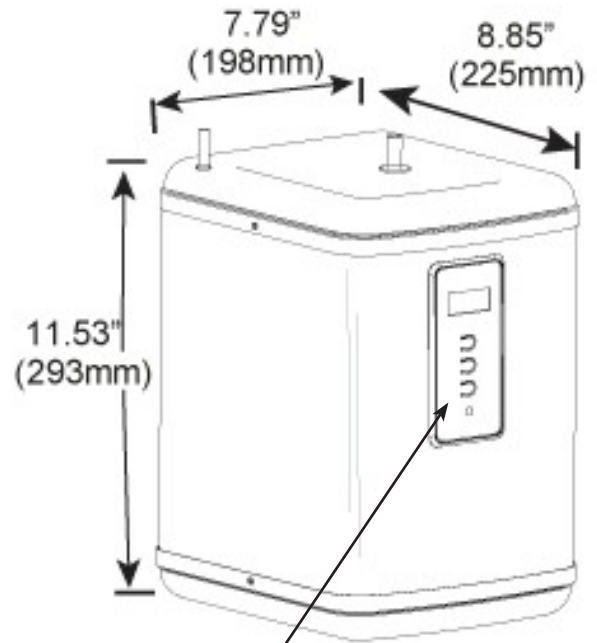

- Temperature Display  
\*\*\* Adjustable from 122°F (50°C) to 208°F (98°C)
- \*\*\* Temperature Setting - UP
- \*\*\* Temperature Setting - Down
- Power
- LED Indication

## Water Filter



Install vertically with cartridge hanging down  
Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement

### Install Kit items

