

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CP-JR-CT1-SWF-PB-K **Push button, countertop mount**



Low volume chilled water on tap



- Perfect for office, hotel suites, wineries & residential
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- Integrated CR-12FC filter system
- Blue LED illuminated push and hold to dispense button

Specifications

- 40, 8oz drinks per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Operating temperature range: 40°-100°
- Electrical: 120v - 3.0 Amps - 60 Hz
- Water bath: 1 Gallon
- Ice bank: 3 lbs
- Weight: 55 lbs
- Clearance: 7.375"
- 10.75"W x 18.125"D x 17"H
- CR-LBS10JG - Leak block sensor
- All fittings needed for installation

* For CP-JR units using reverse osmosis water, add -RO to the end of the model number and call for pricing.

* All other CP-JR chillers are compatible with reverse osmosis water as is

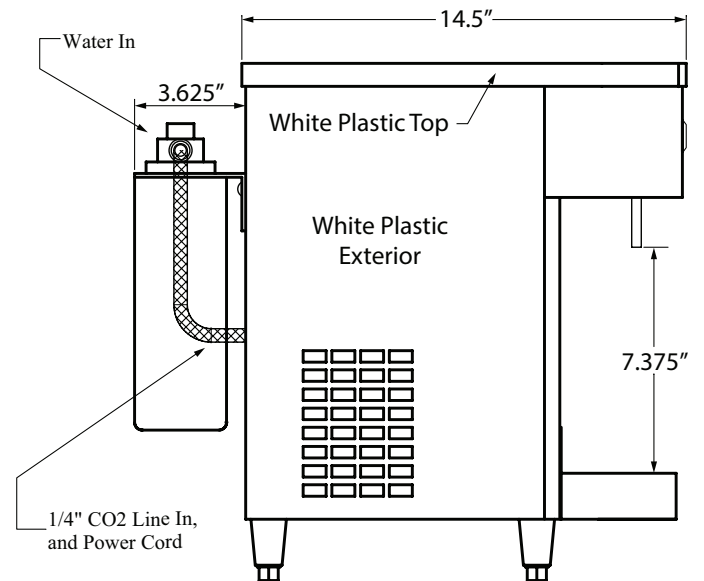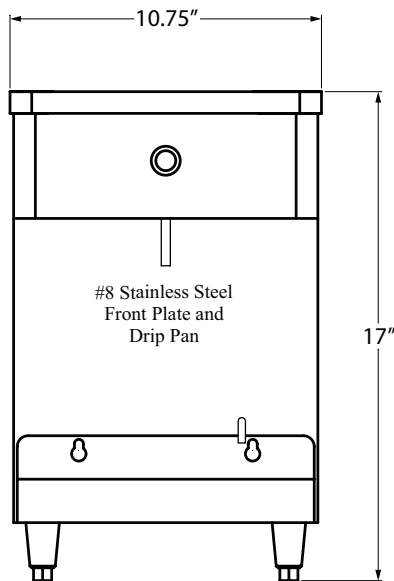

- Air intake on left side
- Allow for 6" rear & side clearance around unit for air flow
- 2.5" legs
- Pre-mounted water filter system 2FC quick change cartridge

- Filter rated at 1.5 gpm, 6,000 Gallons
- 1/2 micron particulate reduction, taste, odor, color & contaminant reduction
- 3/8" water connection
- 9' electrical cord NEMA 5-15 plug
- Condensate drain into drip pan

Complete installation kit is included with purchase of unit

The unit comes standard with a filter system built on and a water pressure reducer valve installed. Installation kit comes complete with a leak block sensor, hose and angle stop fittings.



CR-LBS10JG
Leak block sensor

+



PASPP6 fitting
Angle stop fittings

=



Included
installation kit

Accessories:

- **2FC replacement filter**
Replacement water filter
Compact fibredyne cartridge
for CP-JR models

