







<u>Scan for more info!</u> Owners manual Install guide

CR-1-iN2-2P ProFusion Countertop System




Specifications

- 50, 12oz cups per hour @<40°F
- Self-contained refrigeration system
- Compressor: 1/5 H.P.
- Refrigerant: R134a CFC-free
- Operating temperature range: 40°F-100°F
- Electrical: 115VAC/60Hz/1 Phase
- 3.4 AMPS
- Minimum circuit breaker size: 15 amps
- BTU: 2,200 per hour average
- Water bath: 5 gallons
- Ice bank: 10 lbs
- Weight: 75
- Cup clearance: 8.5"
- 12.38"W x 27.5"D x 25"H
- * Actual height varies depending on tap handle style

N₂ Beverages on Tap

- Nitrogenated and Still Beverage on Tap.
- Flash chills ambient temp keged beverages.
- The system utilizes one keg of cold brew coffee, tea or your craft beverage of choice to dispense two different style beverages.
- Simple set-up: one keg connection and one gas connection.
- Integrated ProFusion injector nitrogenates the beverage at the time of dispense
- Two on-board regulators feed both the keg and injector pressures.
- Built in stainless steel particulate filter, 50 micron, washable and reusable.
- Optional custom tap handles available.
- 304 stainless steel brushed finish faucet plate and drip pan
 - N₂ primary regulator
 - Available with premix tank quick connect couplers or with D style keg coupler.
 - Air intake at rear with air filter
 - Allow 4 inch rear and side clearance for airflow
 - 6 ft overflow drain hose
 - 9 ft electrical cord NEMA 5-15
 - 4.25 inch legs

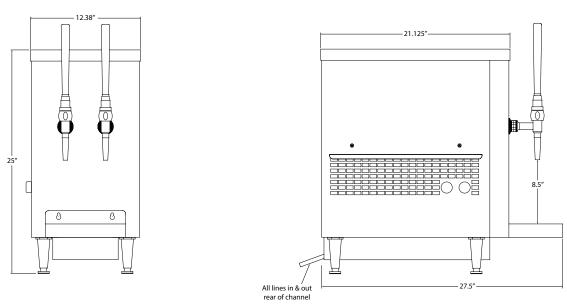



Accessories:

CR-PMT-5G5 gallon premix tank



 CR-CUSTAP Custom tap handles. Contact factory for options and details.



Crysalli Beverage Systems a division of WPD 1739 Sabre Street, Hayward, CA 94545

ProFusion system install kits:

CR-KIT-CR1-iN2-P

Kit includes primary nitrogen regulator, plumbing connections, and includes, two premix tank connections (gas and liquid).









Liquid Ball Lock

CR-KIT-CR1-iN2-D

Kit includes primary nitrogen regulator, plumbing connections, and includes, one D style keg connector.





- Nitrogen Regulator D Style keg connector
- CR-PMT-2.5G 2.5 gallon premix tank



 CR-10-1591
Cleaning and sanitizing kit for cold brew systems



□ CR-NTAC-2CK





510.732.0100 CR07292022





www.crysalli.com