

# CR-UCM2-2CL-S0096

## Remote Sparkling & Chilled Still Water Chiller



Commercial remote/undercounter chiller unit that provides cold-carbonated sparkling water and chilled still water. Self-contained refrigeration designed for back-of-house or undercounter installation up to 75' from draft tower. Suitable for high-volume service stations and hospitality applications.

### Features

- Cold carbonation at up to 80 liters/hour (<40°F)
- Sparkling and chilled still water
- High-efficiency self-contained refrigeration
- Built-in re-circulatory pump allows for an installation distance up to 75' between tower and chiller
- 1 Stainless steel water coil (sparkling water) & 1 copper coil (chilled still water)
- Multi-tower and custom configurations available

**R290**



### Accessories

- Water filter system (required):
  - CR-24FC: Twin filter system, compact fibredyne filters, reduce chlorine, taste, odor, color while retaining the good minerals that are essential for bottle quality tasting water, 19"H x 17"W, 5 gpm, 30,000 gal, TOC & ½ micron filtration
  - CR-24FCP: Twin filter system with prefilter, compact fibredyne filters, reduce chlorine, taste, odor, color and organic chemicals while providing exceptional sediment reduction with resistance to premature plugging, 19.25"H x 21.75"W, 5 gpm, 30,000 gal, TOC & ½ micron filtration
- Install kit (required):
  - CR-KIT-UCM: Installation Kit for remote chiller units, UCM1 & UCM2, includes: 5ft of CR-4L38 insulated trunkline, LBS10JG Leak Block sensor, fittings, clamps, tubing and insulation to install the CR-24FC filter system, CR-UCM# and CBR tower together
- CO2 regulators:
  - CR-PC160-14FCV: Primary high pressure CO2 regulator for CO2 tank
  - CR-S115-14FCV: Secondary CO2 regulator for bulk CO2 supply
- Wall brackets:
  - CR-CWB1: Single CO2 gas cylinder wall bracket
  - CR-CWB2: Twin CO2 gas cylinder wall bracket
  - CR-WMB2: Wall mount bracket for CR-UCM2
- Ventilation:
  - CR-ABUCM: Air baffle recommended anytime a remote chiller is installed in a cabinet
  - CR-TFB1: Thermostatic fan box recommended anytime a remote chiller is installed in a cabinet
- Trunkline:
  - CR-4L38: Four-line insulated trunkline 3/8" two-product, two recirculating 5' is included in remote chiller install kit
- Power cord:
  - CR-L5-30P-8FT: NEMA L5-30 power cord 125 VAC, 10 gage, 30 AMP
- Use with CBR-V2 series draft tower and drain pan



# CR-UCM2-2CL-S0096

Remote Sparkling & Chilled Still Water Chiller






Scan for more resources!

## Line Drawings

Front View

Side View

Rear View

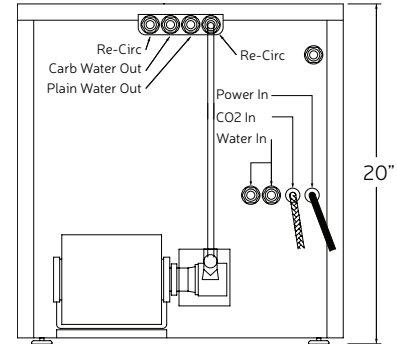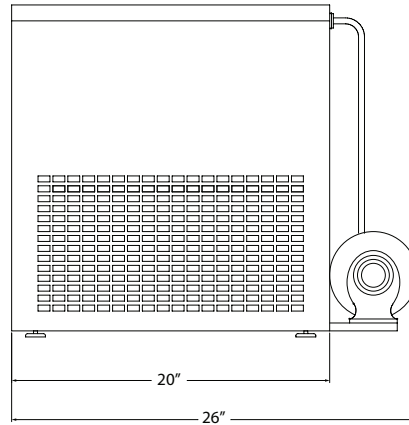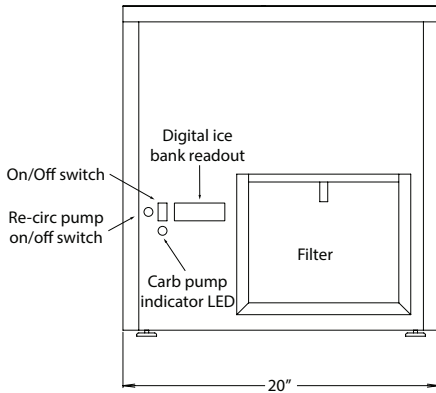

System hardwired to a 125VAC / 1 Phase / 30AMP circuit.  
\*NEMA L5-30 power cord 125VAC, 10 gage, 30AMP can be purchased as an accessory. Part # CR-L5-30P-8FT

- 3/8" Water inlet push in fitting at back of unit
- 7' Over flow drain hose
- 7' CO2 hose 1/4" flare fitting
- Trunkline connections at the top, back of unit
- CO2, drain & electrical out at back side
- 30 Amp NEMA L5-30 Receptacle or hard wired required
- Ensure well-ventilated space or cabinet
- Air intake at front with air filter
- Allow for 6" side clearance for air flow out
- Allow for 8" of clearance above unit for service and water bath access
- Allow for 3" of rear clearance for connections

Capacity	80 liters/hour (<40°F)
Refrigerant	R290
Width	20"
Depth	26"
Height	20"
Compressor	1/3 H.P.
Carbonator	1/3 H.P.

Operating temp	40°F-100°F
Electrical	120v - 20.65 Amps
BTU Output	~2,600 BTU/hr
Water bath	6 gal
Ice bank	25 lbs
Weight	180 lbs