



Project:

Scan for more info!



Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CR-UCW
Still Water Only
Undercounter Unit


Specifications:

130 drinks per hour @ 40° or less
Self-Contained Refrigeration System
Compressor: 1/5 H.P.
Refrigerant: R134a CFC-free
BTU: 2,200 per hour Ave
Operating Temperature Range: 40°-100°
Electrical: 120V - 3 amp
Water Bath: 4 Gallons
Ice Bank: 9.5 lbs
12" W x 18.75" D x 24.5" H
Weight: 115 lbs




Sparkling & Chilled Water on Tap:

- **Designed for undercounter or backhouse mounting applications: Up to 30'**
- **Use with our Single Faucet Tower, CBR-V1 or CM-1PB. Other options, styles and color Towers available.**

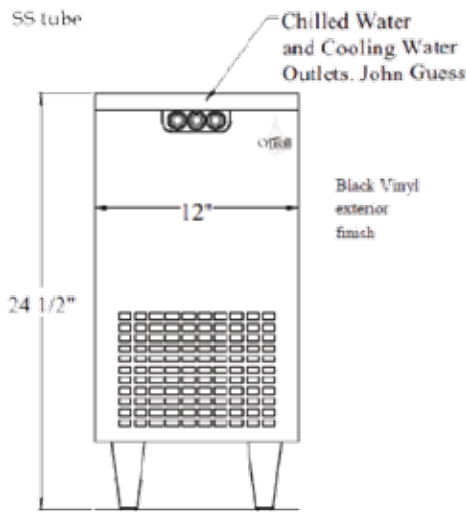

Note: Water Inlet 1/4" Flexible Tubing, Condensate Drain Hose 3/8" Flexible Tubing and Power Cord. Bottom Front.

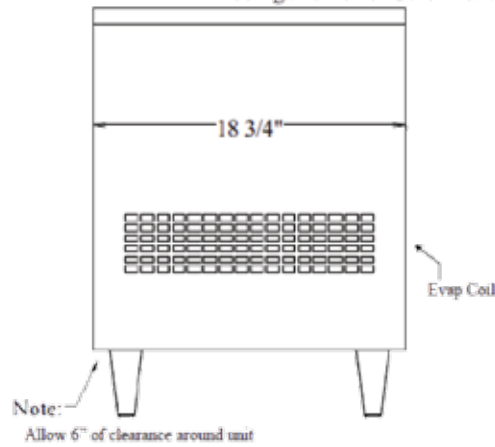

- 7' incoming water (1/4")
- 9' 120v electrical cord
- Allow for rear & side clearance around unit for airflow

- 7' Overflow Drain hose
- 4" legs
- Allow for 8" of clearance above the unit for service and access to water bath.

Required Accessories Checklist:



- CBR-V1C
- CBR-V1WHT
- CBR-V1BLU

Single Valve, Single Product One SSQ Adjustable flow faucet



- CM-1PB

AquaZone Graphics, Single Product Push Button Counter mount dispenser with built in drain. 120v

Still Water Only



- RDP-1

Flush mount, stainless drain pan and tower mount. For use with CBR-V1C and CBR-V2C



- DP-CT

Stainless countertop mount drain pan, 1/2" drain pipe



- CR-24FCP with Prefilter
- CR-24FC without Prefilter

Twin Filter System with Compact Fibredyne filters, 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- CR-KIT-SWUC

Installation kit for Undercounter Chiller units Includes: 5' of CR-4L38 trunkline
Still Water Only



- CR-4L38

Four line insulated trunk line 3/8". Two product, two recirculating 5' is included in Undercounter Install kit

- CR-ABUCM Air Baffle Accessory



NSF Certified under NSF/ANSI Standard 18

